

# NIGHTSTICK®

Life Depends on Light™

## Professional Lighting Products

*Military*  
*Law Enforcement*  
*Aerospace*  
*Automotive*  
*Industrial*  
*Marine*



**BAYCO**  
PRODUCTS INC.  
**30+**  
**YEARS**  
SINCE 1984

# 2015

## Mini-TAC Pgs 8-9

MiniTAC Series Non-Rechargeable / Metal



## Mini-TAC Pro Pgs 10-11

MiniTAC Pro Series Non-Rechargeable / Metal



## Mini-TAC UV Pgs 12-13

MiniTAC Series Non-Rechargeable / Metal





# Tactical Pgs 14-43

**TAC 300 Series** Non-Rechargeable / Waterproof

**TAC 400 Series** Rechargeable / Waterproof

**TAC 500 Series** Rechargeable / Waterproof / Multi-Function



**180 L** FDL-300R



**180 L** TAC-300B



**180 L** TAC-300T



**180 L** TAC-300Y



**150 L** TAC-302B



**500 L** XTREME LUMENS TAC-310XL



**180 L** TAC-350B



**350 L** XTREME LUMENS TAC-360XL



**200 L** TAC-400B



**200 L** TAC-400T



**200 L** TAC-400Y



**200 L** TAC-450B



**800 L** XTREME LUMENS TAC-410XL



**800 L** XTREME LUMENS TAC-460XL



**200 L** TAC-500B



**200 L** TAC-500T



**200 L** TAC-500Y



**800 L** Rechargeable upgrade available TAC-510XL



**800 L** Rechargeable upgrade available TAC-540XL



**200 L** TAC-550B



**800 L** XTREME LUMENS TAC-560XL

## Long Gun Light Kits

Pgs 45-49



## Helmet Light Kits and Mounts

Pgs 50-55



## Duty / Personal-Size Pgs 56-67

NSR 9000 Series Rechargeable / Waterproof / Multi-Function



## Full-Size Pgs 68-71





# Multi-Purpose Pgs 72-85

**Multi-Function** Polymer / Flashlight / Floodlight / Dual-Light

**130 L** NSP-2422B

**130 L** NSP-2422R

**200 L** NSR-2492

**60 L** NSP-1400B

**65 L** NSP-1400

**65 L** NSP-1400T

**65 L** NSP-1402B

**65 L** NSP-1404B

**65 L** NSP-1224R

**65 L** NSP-1224B

**150 L** NSP-1260

**1200 L** SLR-2120

**230 L** SLR-2166

**230 L** NSR-2166B

**230 L** NSR-2166R

**9 L** NSP-1206B

**9 L** NSP-1206R

## Headlamps Pg 86-91

Dual-Light Spotlight / Floodlight / Dual-Light



NSP-4602B



NSP-4608B



NSP-4612B



NSP-4604B




NSP-4610B

## Safety Lights Pg 108-109

Safety Light Series Flashlight / Safety Light

150L

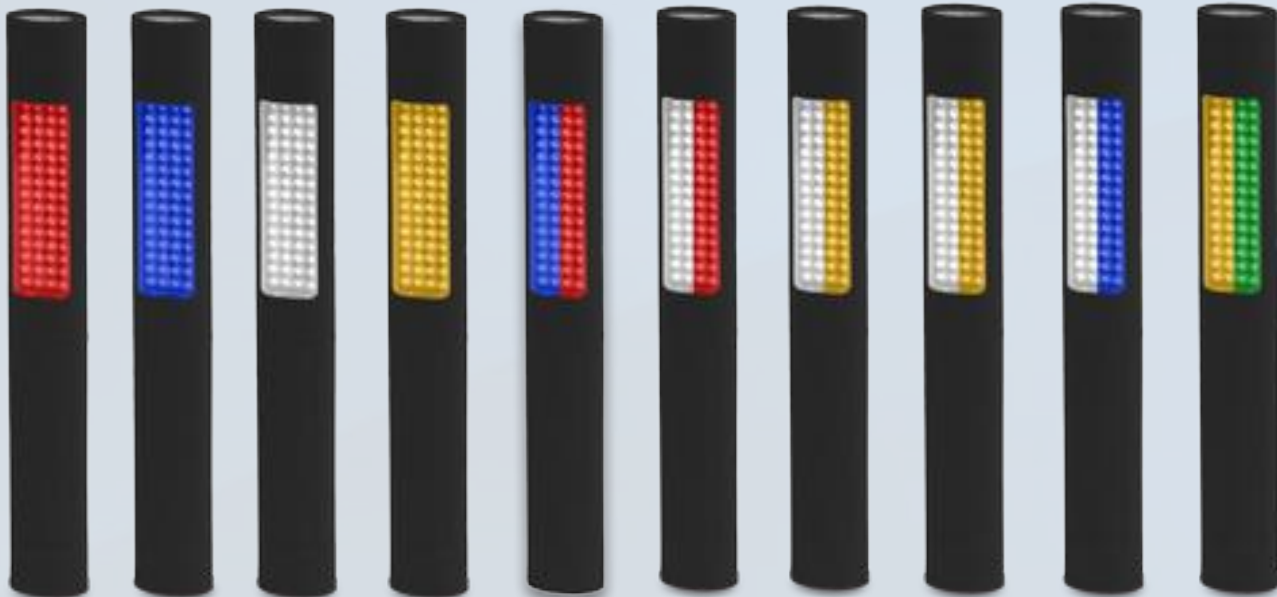

NSP-1162

NSP-1164

NSP-1166

NSP-1168

NSP-1170

NSP-1172

NSP-1174

NSP-1176

NSP-1178

NSP-1180



# Intrinsically Safe Pg 92-107

**Flashlights / Headlamps** Non-Rechargeable / Polymer

Nightstick Intrinsically Safe flashlights and headlamps are cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present.



XPP-5410G



XPP-5412G



XPP-5420G



XPP-5420B



XPP-5422G



XPP-5422B



*Available Early Q2*

XPP-5422GM



XPP-5450G



XPP-5452G



XPP-5454G

*Available Early Q2*



XPP-5456G



XPP-5458G

# Mini-TAC - Metal

## Mini-TAC Non-Rechargeable



These non-rechargeable Mini-TAC lights each use a CREE® LED and have a deep parabolic reflector creating a tight, long throw beam for distance illumination. With a water resistant design, each light is constructed from aircraft-grade 6061-T6 aluminum with a Type II hard anodized finish. The tail switch on each light provides momentary or constant-on functionality. The MT-100, 100BL, 100R, 110 and 120 each come with a removable pocket clip, while the MT-130, with its gooseneck design, comes with a removable clip-on magnet for hands-free use. The MT-110, 120 and 130 also include a removable wrist lanyard. The MT-100s are powered by two AAA batteries. The MT-110 uses a single AA. And both the MT-120 and 130 use two AA batteries. In all cases, the batteries are included.



Flashlight



**140 Lumens**

- Momentary or constant-on
- Aircraft-grade 6061-T6 aluminum housing
- Small light-weight design



MT-120

MT-100

MT-100BL

MT-100R

MT-110

MT-130





# Mini-TAC - Metal

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum
- Type II hard anodized finish
- Non-slip grip
- Water resistant
- Impact & chemical resistant
- Powered by: 2 AAA (MT-100s), 1 AA (MT-110), 2 AA (MT-120/130)
- Limited Lifetime Warranty\*



Magnetic base (MT-130)



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## INCLUDED


- Flashlight
- Removable pocket clip (MT-100, 100BL, 100R, 110 & 120)
- Removable wrist lanyard (MT-110, 120 & 130)
- Hands-free magnet (MT-130)
- Battery(ies)



Model	Description	UPC 0 17398
MT-100	Non-rechargeable mini tactical flashlight with 2 AAA batteries, and removable pocket clip	80369 4
MT-100BL	Non-rechargeable mini tactical flashlight with 2 AAA batteries, and removable pocket clip	80425 7
MT-100R	Non-rechargeable mini tactical flashlight with 2 AAA batteries, and removable pocket clip	80426 4
MT-110	Non-rechargeable mini tactical flashlight with 1 AA battery, removable pocket clip and removable wrist lanyard	80370 0
MT-120	Non-rechargeable mini tactical flashlight with 2 AA batteries, removable pocket clip and removable wrist lanyard	80371 7
MT-130	Non-rechargeable mini tactical gooseneck flashlight with 2 AA batteries, removable magnetic base and wrist lanyard	80372 4


## MT-100 SPECIFICATIONS

- Lumens: 100
- Run-time: 1.5 hours
- Beam distance: 44 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.4in, diameter: 0.6in, weight: .8oz




## MT-110 SPECIFICATIONS

- Lumens: 90
- Run-time: 1 hours
- Beam distance: 48 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 3.9in, diameter: 0.9in, weight: 1.5oz




## MT-120 SPECIFICATIONS

- Lumens: 140
- Run-time: 1.5 hours
- Beam distance: 68 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.6in, diameter: 0.9in, weight: 2.3oz



## MT-130 SPECIFICATIONS

- Lumens: 140
- Run-time: 1.5 hours
- Beam distance: 68 meters
- IP-X4 water resistant
- Drop rating: 2 meters
- Handle length: 5.6in, overall length: 15.6in, diameter: 0.9in, weight: 5.2oz (without magnetic base)



# Mini-TAC Pro - Metal

## Mini-TAC Pro Non-Rechargeable



These non-rechargeable Mini-TAC lights each use a CREE® LED and have a deep parabolic reflector creating a tight, long throw beam for distance illumination. With a waterproof design, each light is constructed from aircraft-grade 6061-T6 aluminum with a Type III hard anodized finish. The tail switch on the MT-200, 210 and 220 provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The MT-230, specifically design for EMS, has momentary or constant-on functionality and 3 user-selectable brightness modes as well, but starts off in low and cycles up through the medium and high settings. All 4 lights come with a removable pocket clip. The MT-200 is powered by a two AAA batteries. The MT-210 and 230 each use a single AA. And the MT-220 uses two AA batteries. In all cases, the batteries are included.



**200 Lumens**

- Momentary or constant-on, plus 3 user-selectable brightness settings plus strobe (no strobe on MT-230)
- Aircraft-grade 6061-T6 aluminum housing
- Small light-weight design



**MT-220**



# Mini-TAC Pro - Metal

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight plus 3 brightness levels & strobe (no strobe on MT-230)
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum
- Type III hard anodized finish
- Non-slip grip
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by: 2 AAA (MT-200), 1 AA (MT-210/230), 2 AA (MT-220)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## INCLUDED

- Flashlight
- Removable pocket clip
- Battery(ies)



Model	Description	UPC 0 17398
MT-200	Non-rechargeable Mini-TAC Pro flashlight with 2 AAA batteries and pocket clip	80405 9
MT-210	Non-rechargeable Mini-TAC Pro flashlight with 1 AA battery, and removable pocket clip	80373 1
MT-220	Non-rechargeable Mini-TAC Pro flashlight with 2 AA battery, and removable pocket clip	80374 8
MT-230	Non-rechargeable Mini-TAC Pro flashlight with 1 AA battery, and removable pocket clip	80375 5

## MT-200 SPECIFICATIONS

FL1 STANDARD	HIGH	MEDIUM	LOW
	100 LUMENS	60 LUMENS	30 LUMENS
	1h 30min	3h	4h 30min
	51m	36m	29m
	667cd	334cd	204cd



- Length: 5.5in, head diameter: 0.7in, handle diameter: 0.6in, weight: 1.9oz

## MT-210 SPECIFICATIONS

FL1 STANDARD	HIGH	MEDIUM	LOW
	120 LUMENS	55 LUMENS	30 LUMENS
	1h 30min	4h	6h
	70m	51m	40m
	1227cd	656cd	398cd



- Length: 4in, head diameter: 0.9in, handle diameter: 0.6in, weight: 2.2oz

## MT-220 SPECIFICATIONS

FL1 STANDARD	HIGH	MEDIUM	LOW
	200 LUMENS	90 LUMENS	45 LUMENS
	1h 30min	4h	6h
	100m	73m	56m
	2486cd	1335cd	797cd



- Length: 6in, head diameter: 0.9in, handle diameter: 0.6in, weight: 3.2oz

## MT-230 SPECIFICATIONS

FL1 STANDARD	LOW	MEDIUM	HIGH
	3.6 LUMENS	10 LUMENS	60 LUMENS
	2h	14h	2h
	4m	46m	65m
	1076cd	538cd	4cd



- Length: 4in, head diameter: 0.9in, handle diameter: 0.6in, weight: 2.2oz

# Mini-TAC UV - Metal

## Mini-TAC UV Non-Rechargeable



These non-rechargeable Mini-TAC UV lights each use an Ultraviolet LED rated at 365 Nanometers for the purpose of detecting hidden security markings in documents, spotting leak detection fluids and as an aid in visually locating proteins in forensics work. With a water resistant design, each light is constructed from aircraft-grade 6061-T6 aluminum with a Type II hard anodized finish. The tail switch on each light provides momentary or constant-on functionality. The MTU-106 comes with a removable pocket clip, while the MTU-136, with its gooseneck design, comes with a removable wrist lanyard and a removable clip-on magnet for hands-free use. The MTU-106 is powered by two AAA batteries. And the MTU-136 use two AA batteries. In both cases, the batteries are included.



**MTU-106**



**365** Nanometers

- 1.25 Hours run-time
- Momentary or constant-on
- Aircraft-grade 6061-T6 aluminum housing
- Includes magnetic base for hands-free use



**MTU-136**

MTU-106

MTU-136



# Mini-TAC UV - Metal

## FEATURES: BOTH MODELS


- Ultraviolet LED technology – 50,000+ hours LED
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing
- Type II hard anodized finish
- Non-slip grip
- Water resistant
- Impact & chemical resistant
- Powered by: 2 AAA (MTU-106), 2 AA (MTU-136)
- Limited Lifetime Warranty\*

## MTU-106 SPECIFICATIONS

- Nanometers: 365
- Run-time: .75 hours
- IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.4in, diameter: 0.6in, weight: .8oz

## MTU-136 SPECIFICATIONS

- Nanometers: 365
- Run-time: 1.25 hours
- IP-X4 water resistant
- Drop rating: 2 meters
- Handle length: 5.6in, overall length: 15.6in, diameter: 0.9in, weight: 5.2oz (without magnetic base)

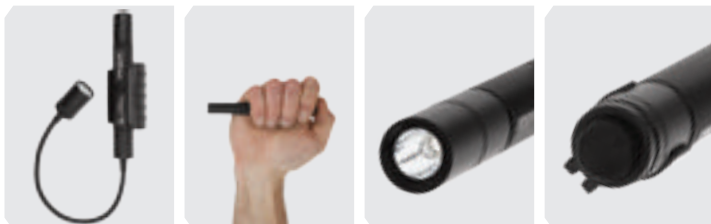

Magnetic base (MTU-136)

Handheld

High-efficiency deep parabolic reflector

Large textured tail-switch

Model	Description	UPC 0 17398
MTU-106	Non-rechargeable mini tactical UV flashlight with 2 AAA batteries and removable pocket clip	80436 3
MTU-136	Non-rechargeable mini tactical gooseneck UV flashlight with 2 AA batteries, clip-on magnet and removable wrist lanyard	80437 0

## INCLUDED

- Flashlight
- Removable pocket clip (MTU-106)
- Removable wrist lanyard (MTU-136)
- Hands-free magnet (MTU-136)
- Batteries



# Tactical Fire Light - Polymer

## Tactical Fire Light Non-Rechargeable



*This compact non-rechargeable polymer tactical fire light uses a CREE® LED rated at 180 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 190 meters. The tail-cap switch provides momentary or constant-on functionality. The 1" handle diameter allows it to be paired with most 3rd party helmet mounts for use by Fire and Emergency personnel. Power comes from a pair of included CR-123 Lithium batteries.*

Flashlight



# 180 Lumens

- 3 Hours run-time
- Momentary or constant-on
- Beam distance rated at 190 meters
- Fits most 3rd party 1" helmet mounts
- Powered by 2 – CR-123 Lithium batteries (included)

**FDL-300R**


FDL-300R



# Tactical Fire Light - Polymer

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Resistant to high temperatures
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most 3rd party helmet mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 - CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*



Handheld




High-efficiency deep parabolic reflector



Large textured tail-switch

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle  
diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
FDL-300R	Red	80361 8
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



Safety cones



Remote pressure switch



Side-switch



CR-123 batteries

# Tactical - Polymer

## Tactical Flashlights Non-Rechargeable



*These compact non-rechargeable polymer tactical flashlights use a CREE® LED rated at 180 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 190 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.*



Flashlight



# 180 Lumens

- 3 Hours run-time
- Momentary or constant-on
- Beam distance rated at 190 meters
- Glass-filled nylon polymer housing
- Powered by 2 – CR-123 Lithium batteries (included)

**TAC-300B**

**TAC-300T**

**TAC-300Y**



TAC-300B

TAC-300T

TAC-300Y






# Tactical - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 – CR-123 Lithium batteries (included)
- Removable pocket clip
- Available in black, tan & yellow
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle  
diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Weapon mountable  
(400B-RPS required)

Handheld

High-efficiency deep  
parabolic reflector

Large textured  
tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-300B	Black	80219 2
TAC-300T	Tan	80220 8
TAC-300Y	Yellow	80221 5
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Lithium batteries (10 pack)	80112 6



Safety cones



Remote pressure  
switch



Side-switch



Spare batteries

## Tactical - Polymer

# Tactical Flashlight – Green LED Non-Rechargeable



*This compact non-rechargeable polymer tactical flashlight uses a Green CREE® LED rated at 150 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 180 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.*

Flashlight



# 150 Lumens

- 3.5 Hours run-time
- Momentary or constant-on
- Beam distance rated at 180 meters
- Glass-filled nylon polymer housing
- Powered by 2 – CR-123 Lithium batteries (included)


**TAC-302B**

TAC-302B



# Tactical - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Powered by 2 – CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*



Weapon mountable (400B-RPS required)



Handheld




High-efficiency deep parabolic reflector



Large textured tail-switch

## SPECIFICATIONS

- Lumens: 150
- Run-time: 3.5 hours
- Beam distance: 180 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in, head diameter: 1.25in, handle diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-302B	Black	80428 8
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Lithium batteries (10 pack)	80112 6



Safety cones



Remote pressure switch



Side-switch



Spare batteries

**XTREME  
LUMENS™**
**Tactical - Xtreme Lumens™ - Polymer**

# Xtreme Lumens™ Tactical Flashlight

## Non-Rechargeable



*This compact non-rechargeable polymer Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 500 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 150 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.*



Flashlight



# 500 Lumens

- 1.5 Hours run-time
- Momentary or constant-on
- Beam distance rated at 150 meters
- Glass-filled nylon polymer housing
- Powered by 2 - CR-123 Lithium batteries (included)

**TAC-310XL**


TAC-310XL



# Tactical - Xtreme Lumens™ - Polymer




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Glass-filled nylon polymer housing
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by 2 - CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 500
- Run-time: 1.5 hours
- Beam distance: 150 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in,  
handle diameter: 1.035in, weight: 4.4oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Weapon mountable  
(400B-RPS required)



Handheld



High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-310XL	Non-rechargeable polymer Xtreme Lumens tactical flashlight with removable pocket clip and 2 - CR-123 batteries - Black	80417 2
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Lithium batteries (10 pack)	80112 6



Safety cones



Remote pressure  
switch



Side-switch



Spare batteries

## Tactical - Metal

# Tactical Flashlight Non-Rechargeable



*This compact non-rechargeable metal tactical flashlight uses a CREE® LED rated at 180 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 190 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a pair of included CR-123 Lithium batteries.*



Flashlight



# 180 Lumens

- **3 Hours run-time**
- **Momentary or constant-on**
- **Beam distance rated at 190 meters**
- **Aircraft-grade 6061-T6 aluminum housing**
- **Powered by 2 – CR-123 Lithium batteries (included)**

**TAC-350B**


TAC-350B



# Tactical - Metal

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 – CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*



Weapon mountable  
(400B-RPS required)



Handheld




High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in,  
handle diameter: 1.035in, weight: 5.7oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-350B	Black	80242 0
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Lithium batteries (10 pack)	80112 6



Safety cones



Remote pressure  
switch



Side-switch



Spare batteries

**XTREME  
LUMENS™**
**Tactical - Xtreme Lumens™ - Metal**

# Xtreme Lumens™ Tactical Flashlight

## Non-Rechargeable



*This compact non-rechargeable metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 500 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 150 meters. The tail-cap switch provides momentary or constant-on functionality. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. Power comes from a pair of included CR-123 Lithium batteries.*



Flashlight



# 500 Lumens

- 2 Hours run-time
- Momentary or constant-on
- Beam distance rated at 150 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by 2 - CR-123 Lithium batteries (included)

**TAC-360XL**


TAC-360XL





# Tactical - Xtreme Lumens™ - Metal




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 - CR-123 Lithium batteries (included)
- Removable pocket clip
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 500
- Run-time: 2 hours
- Beam distance: 150 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle diameter: 1.035in,  
weight: 5.7oz



## INCLUDED

- Flashlight
- Two CR-123 Lithium batteries
- Removable metal pocket clip



Weapon mountable  
(400B-RPS required)



Handheld



High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-360XL	Non-rechargeable metal Xtreme Lumens tactical flashlight with removable pocket clip and 2 - CR-123 batteries - Black	80364 9
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
CR-123-10	CR-123 Lithium batteries (10 pack)	80112 6



Safety cones



Remote pressure  
switch



Side-switch



Spare batteries

# Tactical - Polymer

## Tactical Flashlights Rechargeable



*These compact rechargeable polymer tactical flashlights use a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).*



Flashlight



**200 Lumens**

- 3 Hours run-time
- Momentary or constant-on
- Beam distance rated at 210 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery

**TAC-400B**

**TAC-400T**

**TAC-400Y**



TAC-400B

TAC-400T

TAC-400Y



# Tactical - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Available in black, tan & yellow
- Limited Lifetime Warranty\*



Weapon mountable  
(400B-RPS required)



Handheld




High-efficiency deep  
parabolic reflector



Large textured  
tail-switch

## SPECIFICATIONS

- Lumens: 200
- Run-time: 3 hours
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 4.9oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-400B	Black	80126 3
TAC-400T	Tan	80127 0
TAC-400Y	Yellow	80128 7
TAC-400BDC	No AC power supply	80250 5
TAC-400BLB	Light & battery only	80183 6
TAC-400TDC	No AC power supply	80251 2
TAC-400TLB	Light & battery only	80184 3
TAC-400YDC	No AC power supply	80252 9
TAC-400YLB	Light & battery only	80185 0
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



Safety cones



Remote pressure  
switch



Side-switch



Spare Lithium-ion  
rechargeable battery



Direct wire kit

**XTREME  
LUMENS™**
**Tactical - Xtreme Lumens™ - Polymer**

# Xtreme Lumens™ Tactical Flashlight

## Rechargeable



This compact rechargeable polymer Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).



Flashlight



# 800 Lumens

- 2 Hours run-time
- Momentary or constant-on
- Beam distance rated at 205 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery

**TAC-410XL**


TAC-410XL



# Tactical - Xtreme Lumens™ - Polymer




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Glass-filled nylon polymer housing
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*


## SPECIFICATIONS

- Lumens: 800
- Run-time: 2 hours
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 4.9oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall / vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier

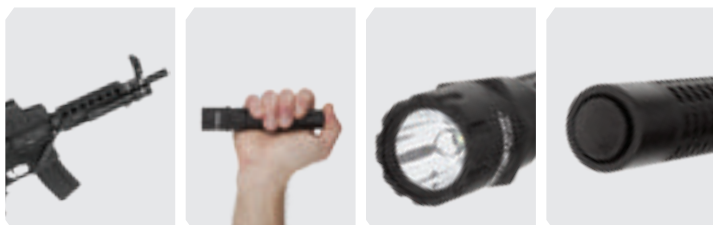

Weapon mountable (400B-RPS required)

Handheld

High-efficiency deep parabolic reflector

Large textured tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-410XL	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black	80418 9
TAC-410XLDC	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black	80430 1
TAC-410XLLB	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black	80431 8
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



Safety cones



Remote pressure switch



Side-switch



Spare Lithium-ion rechargeable battery



Direct wire kit

## Tactical - Metal

# Tactical Flashlight Rechargeable



*This compact rechargeable metal tactical flashlight uses a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).*



Flashlight



# 200 Lumens

- **3 Hours run-time**
- **Momentary or constant-on**
- **Beam distance rated at 210 meters**
- **Aircraft-grade 6061-T6 aluminum housing**
- **Powered by Lithium-ion rechargeable battery**

**TAC-450B**


TAC-450B



# Tactical - Metal

## FEATURES


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*



Weapon mountable (400B-RPS required)



Handheld




High-efficiency deep parabolic reflector



Large textured tail-switch

## SPECIFICATIONS

- Lumens: 200
- Run-time: 3 hours
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall / vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-450B	Black	80243 7
TAC-450BDC	No AC power supply	80254 3
TAC-450BLB	Light & battery only	80253 6
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



Safety cones



Remote pressure switch



Side-switch



Spare Lithium-ion rechargeable battery



Direct wire kit

**XTREME  
LUMENS™**
**Tactical - Xtreme Lumens™ - Metal**

# Xtreme Lumens™ Tactical Flashlight

## Rechargeable



*This compact rechargeable metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 230 meters. The tail-cap switch provides momentary or constant-on functionality. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).*



Flashlight



# 800 Lumens

- 2 Hours run-time
- Momentary or constant-on
- Beam distance rated at 230 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery

**TAC-460XL**


TAC-460XL





# Tactical - Xtreme Lumens™ - Metal




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits most scope/flashlight mounts
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*


## SPECIFICATIONS

- Lumens: 800
- Run-time: 2 hours
- Beam distance: 230 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in,  
head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall / vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier

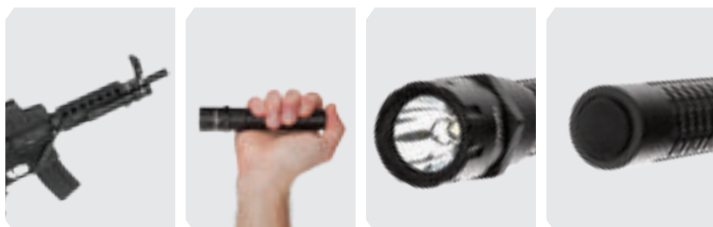

Weapon mountable (400B-RPS required)

Handheld

High-efficiency deep parabolic reflector

Large textured tail-switch

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-460XL	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black	80365 6
TAC-460XLDL	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black	80398 4
TAC-460XLLB	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black	80399 1
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400B-RPS	Remote pressure switch	80130 0
400B-SS	Side switch	80141 6
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



Safety cones



Remote pressure switch



Side-switch



Spare Lithium-ion rechargeable battery



Direct wire kit

# Tactical - Polymer

## Tactical Flashlights Rechargeable - Multi-Function



*These compact rechargeable multi-function polymer tactical flashlights use a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).*



**TAC-500B**

**200 Lumens**

- 3 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 210 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery



**TAC-500T**

**TAC-500Y**

TAC-500B

TAC-500T

TAC-500Y



# Tactical - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap with Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Available in black, tan & yellow
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## SPECIFICATIONS

- Lumens: high-200, medium-125, low-65, strobe-180
- Run-time: high-3 hrs, medium-6 hrs, low-12 hrs, strobe-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 5.1oz

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>200</b> LUMENS	<b>125</b> LUMENS	<b>65</b> LUMENS
	<b>3h</b>	<b>6h</b>	<b>12h</b>
	<b>210m</b>	<b>150m</b>	<b>95m</b>
	<b>12000cd</b>	<b>4951cd</b>	<b>2250cd</b>
	2m ↓ 1m		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-500B	Black	80244 4
TAC-500T	Tan	80245 1
TAC-500Y	Yellow	80246 8
TAC-500BDC	No AC power supply	80256 7
TAC-500BLB	Light & battery only	80255 0
TAC-500TDC	No AC power supply	80258 1
TAC-500TLB	Light & battery only	80257 4
TAC-500YDC	No AC power supply	80260 4
TAC-500YLB	Light & battery only	80259 8
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



Safety cones



Spare Lithium-ion rechargeable battery



Direct wire kit

**XTREME  
LUMENS™**
**Tactical - Xtreme Lumens™ - Polymer**

# Xtreme Lumens™ Tactical Flashlight

## Rechargeable - Multi-Function



High



Medium



Low



Strobe



This compact rechargeable multi-function polymer Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).



# 800 Lumens

- 2 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 205 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery

**TAC-510XL**


TAC-510XL



# Tactical - Xtreme Lumens™ - Polymer



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Glass-filled nylon polymer housing
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector




Large textured tail-switch

## SPECIFICATIONS

- Lumens: high-800, medium-350, low-140, strobe-600
- Run-time: high-2.0 hrs, medium-3.75 hrs, low-8.75 hrs, strobe-3.25 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 5.1oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>800 LUMENS</b>	<b>350 LUMENS</b>	<b>140 LUMENS</b>
	<b>2h</b>	<b>3h 45min</b>	<b>8hr 45min</b>
	<b>205m</b>	<b>157m</b>	<b>99m</b>
	<b>10765cd</b>	<b>6182cd</b>	<b>2460cd</b>



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-510XL	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black	80419 6
TAC-510XLDL	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black	80432 5
TAC-510XLLB	Rechargeable polymer Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black	80433 2
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



Safety cones



Spare Lithium-ion rechargeable battery



Direct wire kit

**XTREME  
LUMENS™**
**Tactical - Xtreme Lumens™ - Metal**

# Xtreme Lumens™ Tactical Flashlight

## Non-Rechargeable Batteries Included - Multi-Function

**METAL  
HOUSING**

High



Medium



Low



Strobe



# 800 Lumens

- 2 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 205 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by 2 - CR-123 Lithium batteries (included)
- Can be upgraded to be a rechargeable light

This compact rechargeable multi-function metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a pair of CR-123 batteries (included) installed into the CR-123 Battery Carrier (included). The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. This light can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords.

**XTREME  
LUMENS™**

**TAC-540XL**


TAC-540XL



# Tactical - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight, 3 brightness levels & strobe
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter fits
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by 2 - CR-123 Lithium batteries (included)
- Can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector




Large textured tail-switch

## SPECIFICATIONS


- Lumens: high-800, medium-350, low-140, strobe-600
- Run-time: high-1.5 hrs, medium-2 hrs, low-4.5 hrs, strobe-2.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.1oz

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>800</b> LUMENS	<b>350</b> LUMENS	<b>140</b> LUMENS
	<b>1h 30min</b>	<b>2h</b>	<b>4h 30min</b>
	<b>205m</b>	<b>157m</b>	<b>99m</b>
	<b>10765cd</b>	<b>6182cd</b>	<b>2460cd</b>



## INCLUDED

- Flashlight
- CR-123 back-up battery carrier
- 2 - CR-123 Lithium batteries



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-540XL	Non-rechargeable battery included metal Xtreme Lumens tactical flashlight with CR-123 Battery Carrier and two CR-123 Lithium batteries - Black	80366 3
400-BATT	Rechargeable Li-ion battery	80144 7
400-CHGR1	Charger for TAC-400 & TAC-500 series flashlights	80142 3
9914-ACCORD	AC power supply cord	81046 3
9914-DCCORD	DC power supply cord - temporary charging from a vehicle cigarette lighter/DC outlet	81047 0
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
9914-DW	Vehicle direct wire kit - for use with optional 400-CHGR1	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



DC power supply cord



AC power supply cord



Charger



Safety cones



Lithium-ion rechargeable battery



Direct wire kit

## Tactical - Metal

# Tactical Flashlight

## Rechargeable - Multi-Function



*This compact rechargeable multi-function metal tactical flashlight uses a CREE® LED rated at 200 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 210 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery and includes a CR-123 Battery Carrier for backup battery power (CR-123 batteries not included).*



# 200 Lumens

- **3 Hours run-time**
- **Momentary or constant-on with 3 brightness levels & strobe**
- **Beam distance rated at 210 meters**
- **Aircraft-grade 6061-T6 aluminum housing**
- **Powered by Lithium-ion rechargeable battery**

**TAC-550B**


TAC-550B





# Tactical - Metal

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector




Large textured tail-switch

## SPECIFICATIONS

- Lumens: high-200, medium-125, low-65, strobe-180
- Run-time: high-3 hrs, medium-6 hrs, low-12 hrs, strobe-5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 210 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.1oz

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>200 LUMENS</b>	<b>125 LUMENS</b>	<b>65 LUMENS</b>
	<b>3h</b>	<b>6h</b>	<b>12h</b>
	<b>210m</b>	<b>150m</b>	<b>95m</b>
	<b>12000cd</b>	<b>4951cd</b>	<b>2250cd</b>



## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-550B	Flashlight	80247 5
TAC-550BDC	No AC power supply	80262 8
TAC-550BLB	Light & battery only	80261 1
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



Safety cones



Spare Lithium-ion rechargeable battery



Direct wire kit

**XTREME  
LUMENS™**
**Tactical - Xtreme Lumens™ - Metal**

# Xtreme Lumens™ Tactical Flashlight

## Rechargeable - Multi-Function

**METAL  
HOUSING**

High



Medium



Low



Strobe



# 800 Lumens

- 2 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 205 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery

This compact rechargeable multi-function metal Xtreme Lumens™ tactical flashlight uses a CREE® LED rated at 800 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 205 meters. The tail-cap switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery and includes the ability to run from a pair of CR-123 batteries (batteries not included) thanks to the CR-123 Battery Carrier (included).

**XTREME  
LUMENS™**

**TAC-560XL**


TAC-560XL



# Tactical - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- Non-slip grip
- Large textured tail-switch
- 1" Handle diameter
- 1.25" Head diameter accepts 3rd party filters
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Can also be powered by two CR-123 Batteries (not included) using the CR-123 Battery Carrier (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch

## SPECIFICATIONS

- Lumens: high-800, medium-350, low-140, strobe-600
- Run-time: high-2.0 hrs, medium-3.75 hrs, low-8.75 hrs, strobe-3.25 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.25in, head diameter: 1.25in, handle diameter: 1.035in, weight: 6.1oz

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>800</b> LUMENS	<b>350</b> LUMENS	<b>140</b> LUMENS
	<b>2h</b>	<b>3h 45min</b>	<b>8h 45min</b>
	<b>205m</b>	<b>157m</b>	<b>99m</b>
	<b>10765cd</b>	<b>6182cd</b>	<b>2460cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- AC power supply
- 12 V DC power supply
- CR-123 back-up battery carrier



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
TAC-560XL	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, AC and 12 V DC power supplies and CR-123 Battery Carrier - Black	80367 0
TAC-560XLDC	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery, wall/vehicle mountable charger, 12 V DC power supply and CR-123 Battery Carrier - Black	80400 4
TAC-560XLLB	Rechargeable metal Xtreme Lumens tactical flashlight with rechargeable Lithium-ion battery - Black	80401 1
200-RCONE	Red safety cone	80131 7
200-YCONE	Yellow safety cone	80132 4
400-BATT	Rechargeable Li-ion battery	80144 7
9914-DW	Direct wire kit	80044 0
CR-123-10	CR-123 Li-ion batteries (10 pack)	80112 6



Safety cones



Spare Lithium-ion rechargeable battery



Direct wire kit

## Long Gun Light Kits

# Tactical Long Gun Light Kit

## Non-Rechargeable



The Nightstick Tactical Long Gun Light Kit provides everything necessary to add a high-power tactical light to any long gun that has a Picatinny or Weaver rail. At the heart of the kit is the Nightstick TAC-300B polymer tactical light rated at 180 lumens. Combined with a high-efficiency deep parabolic reflector, the beam on the TAC-300B is distance rated at 190 meters...perfect for long-distance target acquisitions. With a wide secondary halo of light, the TAC-300B is equally effective in CQB situations. When paired with the included Remote Pressure Switch, the TAC-300B becomes the perfect addition to the weapon. With its momentary on/off design, the Remote Pressure Switch assures the operator of complete control over the full power of the light.

Flashlight



# 180 Lumens

- 190 Meter beam distance
- 3 Hours run-time
- Remote pressure switch with momentary on/off control
- Includes everything needed to mount to any long gun
- Mounts to any mil spec Picatinny or Weaver rail


**TAC-300B-K01**

TAC-300B-K01



# Long Gun Light Kits

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap and remote pressure switch with Type III hard anodized finish
- 1" Handle diameter to fit included mount
- 1.25" Head diameter accepts 3rd party filters
- Quad Lock 1" mount fits mil spec Picatinny or Weaver rail (includes hex wrench)
- Remote pressure switch with momentary on/off control and side switch with momentary or constant-on function
- Waterproof
- Hardened design to withstand weapon recoil
- Chemical resistant
- Includes momentary or constant-on tail switch and removable pocket clip so the light can be used as a conventional tactical light as well
- Powered by 2 – CR-123 Lithium batteries (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector




Large textured tail-switch

Model	UPC 0 17398
TAC-300B-K01	80368 7

## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6in (with RPS), head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz (with RPS)



## INCLUDED

- TAC-300B flashlight
- Standard tail-switch
- Removable pocket clip
- Remote pressure switch
- Quad Lock mount
- Hex wrench
- Self-adhesive Velcro strip
- Alcohol pad
- Two CR-123 Lithium batteries



## Long Gun Light Kits

# Varmint Hunter Green LED Light Kit Non-Rechargeable



The Nightstick Varmint Hunter Green LED Light Kit provides everything necessary to add a high-power Green LED light to any long gun that has a Picatinny or Weaver rail. At the heart of the kit is the Nightstick TAC-302B polymer Green LED light rated at 150 lumens. Combined with a high-efficiency deep parabolic reflector, the beam is distance rated at 180 meters...perfect for long-distance target acquisitions. When paired with the included Remote Pressure Switch, the TAC-302B becomes the perfect addition to any varmint hunter's weapon. With its momentary on/off design, the Remote Pressure Switch assures the hunter of complete control over the full power of the light.

Flashlight



# 150 Lumens

- 180 Meter beam distance
- 3.5 Hours run-time
- Remote pressure switch with momentary on/off control
- Includes everything needed to mount to any long gun
- Mounts to any mil spec Picatinny or Weaver rail


**TAC-302B-K01**

TAC-302B-K01



# Long Gun Light Kits

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap and remote pressure switch with Type III hard anodized finish
- 1" Handle diameter to fit included mount
- 1.25" Head diameter accepts 3rd party filters
- Quad Lock 1" mount fits mil spec Picatinny or Weaver rail (includes hex wrench)
- Remote pressure switch with momentary on/off control and side switch with momentary or constant-on function
- Waterproof
- Hardened design to withstand weapon recoil
- Chemical resistant
- Includes momentary or constant-on tail switch and removable pocket clip so the light can be used as a conventional tactical light as well
- Powered by 2 – CR-123 Lithium batteries (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector




Large textured tail-switch

<b>Model</b>	<b>UPC 0 17398</b>
TAC-302B-K01	80429 5

## SPECIFICATIONS

- Lumens: 150
- Run-time: 3.5 hours
- Beam distance: 180 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6in (with RPS), head diameter: 1.25in, handle diameter: 1.035in, weight: 6.3oz (with RPS)



## INCLUDED

- TAC-302B flashlight
- Standard tail-switch
- Removable pocket clip
- Remote pressure switch
- Quad Lock mount
- Hex wrench
- Self-adhesive Velcro strip
- Alcohol pad
- Two CR-123 Lithium batteries



**XTREME  
LUMENS™**

## Long Gun Light Kits

# Tactical Long Gun Light Kit

## Upgradable to Rechargeable



The Nightstick Xtreme Lumens™ Tactical Long Gun Light Kit provides everything necessary to add a high-power tactical light to any long gun that has a Picatinny or Weaver rail. At the heart of the kit is the Nightstick TAC-460XL tactical light rated at 800 lumens. Combined with a high-efficiency deep parabolic reflector, the beam on the TAC-460XL is distance rated at 205 meters...perfect for long-distance target acquisitions. With a wide secondary halo of light, the TAC-460XL is equally effective in CQB situations. When paired with the included Remote Pressure Switch, the TAC-460XL becomes the perfect addition to the weapon. With its momentary on/off design, the Remote Pressure Switch assures the operator of complete control over the full power of the light.

Flashlight



# 800 Lumens

- 2 Hours run-time
- Remote pressure switch with momentary on/off control
- Beam distance rated at 205 meters
- Includes everything needed to mount to any long gun
- Mounts to any mil spec Picatinny or Weaver rail


**TAC-460XL-K01**

TAC-460XL-K01





# Long Gun Light Kits




## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, bezel & tail-cap
- Type III hard anodized finish
- 1" Handle diameter to fit included mount
- 1.25" Head diameter accepts 3rd party filters
- Quad Lock 1" mount fits mil spec Picatinny or Weaver rail (includes hex wrench)
- Remote pressure switch with momentary on/off control and side switch with momentary or constant-on function
- Waterproof
- Hardened design to withstand weapon recoil
- Chemical resistant
- Serialized for personal identification
- Includes momentary or constant-on tail switch so the light can be used as a conventional tactical light as well
- Powered by 2 – CR-123 Lithium batteries (included) using the included CR-123 Battery Carrier
- Can be upgraded to a rechargeable model by adding the optional rechargeable Lithium-ion battery, charger and power cords
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: 800
- Run-time: 2 hours
- Beam distance: 205 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.7in (with RPS), head diameter: 1.25in, handle diameter: 1.035in, weight: 7.6oz (with RPS)



## INCLUDED

- TAC-460XL flashlight
- Standard tail-switch
- Remote pressure switch
- Quad Lock mount
- Hex wrench
- Self-adhesive Velcro strip
- Alcohol pad
- CR-123 back-up battery carrier
- Two CR-123 Lithium batteries



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch



<b>Model</b>	<b>UPC 0 17398</b>
TAC-460XL-K01	80420 2

## Helmet Light Kits and Mounts

### Heavy-Duty Dual Flashlight Strap

- **Universal design fits virtually any helmet or hardhat**
- **High temperature rated at over 500°F**
- **Constructed from thick-walled black silicone rubber**

*The Heavy-Duty Dual Flashlight Strap is a universal design that will fit virtually any Fire Helmet or Hard Hat. The dual holes located on each side of the strap allow the user to position any flashlight or object up to 1.25" in diameter in either hole or even both holes at the same time. Constructed from thick-walled black silicone rubber, the chemical resistant and waterproof NS-HSR1 is designed to stay in place even in wet conditions. The NS-HSR1 meets requirements of NFPA-1971-8.6 (2013).*



**NS-HSR1**

(Helmet and light not included)

NS-HSR1



# Helmet Light Kits and Mounts

## FEATURES


- Universal design fits virtually any helmet or hardhat
- High temperature rated at over 500°F
- Constructed from thick-walled black silicone rubber
- Dual holes on each side allow for right, left or both side placement of light
- Will hold any flashlight or object up to 1.25" in diameter
- Stays in place even in wet conditions
- Chemical resistant
- Waterproof
- Meets the requirements of NFPA-1971-8.6 (2013)
- Fits helmets with circumference: 24in - 34in
- Material temperature rating: -67°F – 572°F
- Length: 12in, Width: 1.875in
- Wall thickness: .125in, Hole diameter: 1.1875in, Hole spacing: 2.5in, Weight: 3.4oz
- Limited 1 Year Warranty \*\*



Heavy-Duty Silicone Rubber



Dual hole design

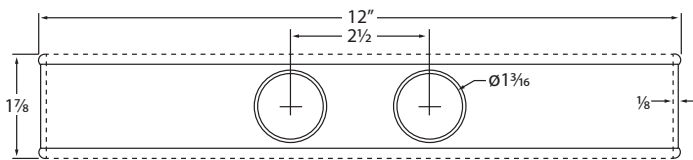

Model	UPC 0 17398
NS-HSR1	80441 7



Fits any light up to 1.25" in diameter

## Helmet Light Kits and Mounts

### Multi-Angle Helmet Mount



The Multi-Angle Helmet Mount is a mounting bracket for attaching a flashlight that has a 1" handle diameter to the brim of virtually any Fire Helmet or Hard Hat. The mount can be attached to either side of the helmet to provide hands-free illumination for the wearer. Additionally, the user can set the angle of the mount through 140 degrees of adjustment to provide clearance around face shields, goggles or other helmet-mounted equipment. The NS-HMC1 meets the requirements of NFPA-1971-8.6 (2013).



**NS-HMC1**

- Works with virtually all fire helmets and hard hats
- Fits any flashlight with a 1" handle diameter
- 140 Degrees of adjustability
- Meets the requirements of NFPA-1971-8.6 (2013)



NS-HMC1



# Helmet Light Kits and Mounts

## FEATURES

- Works with virtually all fire helmets and hard hats
- Can be mounted to the brim on either side of most helmets
- Allows user to determine exact position for optimum light alignment
- 140 Degrees of angle adjustability to clear face shields, goggles or other equipment
- Fits any Nightstick TAC light or any flashlight with a 1" handle diameter
- Cast from ADC12 aluminum alloy
- Meets the requirements of NFPA-1971-8.6 (2013)
- Includes mount, light mounting allen set screw, 2 different length brim mounting allen set screws, and allen wrench
- Length: 3.1in, Width: 1.3in, Height: 0.9in, Weight: 1.7oz
- Limited Lifetime Warranty\*

## INCLUDED

- Multi-angle helmet mount
- Light mounting allen set screw
- Two different length brim mounting allen set screws
- Allen wrench



Multi-angle helmet mount



Cast from ADC12 aluminum alloy



Fits virtually all hard hats




Model	UPC 0 17398
NS-HMC1	80451 6

# Helmet Light Kits and Mounts

## Tactical Fire Light With Multi-Angle Helmet Mount



Flashlight



The Tactical Fire Light w/ Multi-Angle Helmet Mount is a complete system for attaching the Tactical Fire Light to any Fire Helmet or Hard Hat. The Tactical Fire Light is rated at 180 Lumens and has a tight long-throw beam that is distance rated at 190 meters. The entire system is IP-X7 waterproof and is drop rated at 2 meters. The mount can be attached to either side of the helmet to provide hands-free illumination for the wearer. Additionally, the user can set the angle of the mount through 140 degrees of adjustment to provide clearance around face shields, goggles or other helmet-mounted equipment. The FDL-300R-K01 meets the requirements of NFPA-1971-8.6 (2013).



# 180 Lumens

- 180 Lumens
- 3 Hours run-time
- Momentary or constant-on
- Can be mounted to virtually all fire helmets and hard hats
- 140 Degrees of adjustability
- Meets the requirements of NFPA-1791-8.6 (2013)

**FDL-300R-K01**


FDL-300R-K01



# Helmet Light Kits and Mounts

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Large textured tail-switch
- Will fit on virtually all fire helmets and hard hats
- Can be mounted to the brim on either side of most helmets
- Allows user to determine exact position for optimum light alignment
- 140 Degrees of angle adjustability to clear face shields, goggles or other equipment
- Glass-filled nylon polymer flashlight housing
- Mount is cast from ADC12 aluminum alloy
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1791-8.6 (2013)
- Powered by 2 – CR-123 Lithium batteries (included)
- Limited Lifetime Warranty\*



Handheld



High-efficiency deep parabolic reflector



Large textured tail-switch




Multi-angle helmet mount



## SPECIFICATIONS

- Lumens: 180
- Run-time: 3 hours
- Beam distance: 190 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.5in,  
head diameter: 1.25in, handle  
diameter: 1.035in, weight: 6.1oz



## INCLUDED

- FDL-300R flashlight
- Multi-angle helmet mount
- Light mounting allen set screw
- Two different length brim mounting allen set screws
- Allen wrench
- Two CR-123 Lithium batteries



Model	UPC 0 17398
FDL-300R-K01	80368 7

**Duty/Personal-Size - Polymer**

**Duty/Personal-Size Flashlights**  
**Rechargeable - Multi-Function**



These rechargeable polymer multi-function duty/personal-size flashlights use a CREE® LED rated at 350 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 313 meters. The single body switch models (9512B & Y) and the body & tail-cap switch model (9514B) each provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery.



**NSR-9514B**

**350 Lumens**

- 4.25 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 313 meters
- Glass-filled nylon polymer housing
- Powered by Lithium-ion rechargeable battery



**NSR-9512B**

**NSR-9512Y**

NSR-9512B



NSR-9512Y



NSR-9514B





# Duty/Personal-Size - Polymer

## FEATURES: ALL MODELS


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail-cap & 316 stainless steel bezel, both with Type III hard anodized finish
- Non-slip grip
- Body & tail-switch (9514B) – Body switch only (9512B & 9512Y)
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch (NSR-9512B/12Y/14B)



Tail-cap switch (NSR-9514B)

## SPECIFICATIONS

- Lumens: high-350, medium-200, low-55, strobe-300
- Run-time: high-4.25 hrs, medium-8.5 hrs, low-32.5 hrs, strobe-5.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 313 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 8.9in, head diameter: 1.6in, handle diameter: 1.2in, weight: 10.1oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	350 LUMENS	200 LUMENS	55 LUMENS
	4h 15min	8h 30min	32h 30min
	313m	235m	118m
	24100cd	12075cd	6200cd
	2m		
	1m		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply




## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9512B	Rechargeable single switch black polymer flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring	80302 1
NSR-9512BDC	Rechargeable single switch black polymer flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring	80305 2
NSR-9512BLB	Rechargeable single switch black polymer flashlight with battery and anti-roll ring	80308 3
NSR-9514B	Rechargeable dual switch black polymer flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring	80304 5
NSR-9514BDC	Rechargeable dual switch black polymer flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring	80307 6
NSR-9514BLB	Rechargeable dual switch black polymer flashlight with battery and anti-roll ring	80310 6
NSR-9512Y	Rechargeable single switch yellow polymer flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring	80303 8
NSR-9512YDC	Rechargeable single switch yellow polymer flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring	80306 9
NSR-9512YLB	Rechargeable single switch yellow polymer flashlight with battery and anti-roll ring	80309 0
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord – 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9600-CHGR5	5 bank charger	80225 3
9810-LH	Leather holster	98101 9
9914-DW	Direct wire kit	80044 0



Safety cones



Leather holster



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable



Direct wire kit

## Duty/Personal-Size - Metal

# Duty/Personal-Size Flashlights

## Rechargeable - Multi-Function



These rechargeable metal multi-function duty/personal-size flashlights use CREE® LED rated at 350 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 313 meters. The single body switch model (9612) and the body & tail-cap switch model (9614) each provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Power comes from a rechargeable Lithium-ion battery.

High



Medium



Low



Strobe



NSR-9614B

# 350 Lumens

- 4.25 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 313 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery



NSR-9612B



NSR-9612B



NSR-9614B



# Duty/Personal-Size - Metal

## FEATURES: ALL MODELS


- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing/tail-cap and 316 stainless steel bezel
- Type III hard anodized finish
- Non-slip grip
- Body & tail-switch (9614B) – body switch only (9612B)
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch (NSR-9612B/14B)



Tail-cap switch (NSR-9614B)

## SPECIFICATIONS

- Lumens: high-350, medium-200, low-55, strobe-300
- Run-time: high-4.25 hrs, medium-8.5 hrs, low-32.5 hrs, strobe-5.5 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 313 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 8.9in, head diameter: 1.6in, handle diameter: 1.2in, weight: 12.8oz

FL1 STANDARD	HIGH	MEDIUM	LOW
	<b>350 LUMENS</b>	<b>200 LUMENS</b>	<b>55 LUMENS</b>
	<b>4h 15min</b>	<b>8h 30min</b>	<b>32h 30min</b>
	<b>313m</b>	<b>235m</b>	<b>118m</b>
	<b>24100cd</b>	<b>12075cd</b>	<b>6200cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9612B	Rechargeable single switch metal flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring/black	80216 1
NSR-9612BDC	Rechargeable single switch metal flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring/black	80229 1
NSR-9612BLB	Rechargeable single switch metal flashlight with battery and anti-roll ring	80230 7
NSR-9614B	Rechargeable dual switch metal flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring/black	80217 8
NSR-9614BDC	Rechargeable dual switch metal flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring/black	80231 4
NSR-9614BLB	Rechargeable dual switch metal flashlight with battery and anti-roll ring	80232 1
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord – 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9600-CHGR5	5 bank charger	80225 3
9810-LH	Leather holster	98101 9
9914-DW	Direct wire kit	80044 0



Safety cones



Leather holster



Spare Lithium-ion rechargeable battery



Five bank charger




USB charging cable



Direct wire kit

**XTREME  
LUMENS™**
**Duty/Personal-Size - Xtreme Lumens™ - Polymer**

## Duty/Personal-Size Dual-Light™ Flashlight w/ Magnet Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable polymer multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 600 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The powerful magnet built into the tail-cap provides for hands-free use. The housing is made from glass-filled nylon polymer and has an aircraft-grade 6061-T6 aluminum tail-cap and a 316 stainless steel bezel. Both the tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



TECHNOLOGY

**650** Flashlight Lumens

**600** Floodlight Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Powerful tail-cap magnet for hands-free use
- Glass-filled nylon polymer
- Powered by Lithium-ion rechargeable battery (included)


**NSR-9920XL**

NSR-9920XL



# Duty/Personal-Size - Xtreme Lumens™ - Polymer



## FEATURES


- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail cap and 316 stainless steel bezel both with Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body switch
- Floodlight - second body switch
- Integrated tail cap magnet for hands-free usage
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Hands-free tail cap magnet



## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-100, strobe-300, floodlight-600, dual-light-600
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-17 hrs, strobe-6 hrs, floodlight-3, dual-light-3
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 10.9oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650 LUMENS</b>	<b>300 LUMENS</b>	<b>100 LUMENS</b>
	<b>3h</b>	<b>6h</b>	<b>17h</b>
	<b>275m</b>	<b>200m</b>	<b>75m</b>
	<b>18675cd</b>	<b>9687cd</b>	<b>1356cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9920XL	Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Red	80388 5
NSR-9920XLDC	Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Red	80389 2
NSR-9920XLLB	Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with battery and anti-roll ring - Red	80390 8
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord - 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9600-CHGR5	5 bank charger	80225 3
9914-DW	Direct wire kit	80044 0



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

**XTREME  
LUMENS™**
**Duty/Personal-Size - Xtreme Lumens™ - Polymer**

# Duty/Personal-Size Dual-Light™ Flashlight Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable polymer multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 600 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body and tail switches provide momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Both flashlight switches operate in tandem with each other. The second body switch operates the floodlight. The housing is made from glass-filled nylon polymer and has an aircraft-grade 6061-T6 aluminum bezel and tail-cap. Both the tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



TECHNOLOGY

**650** Flashlight  
Lumens

**600** Floodlight  
Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Glass-filled nylon polymer
- Powered by Lithium-ion rechargeable battery (included)


**NSR-9924XL**

NSR-9924XL



# Duty/Personal-Size - Xtreme Lumens™ - Polymer



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum bezel and tail-cap, both with Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body & tail switch (tandem operation)
- Floodlight - second body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch



Tail-cap switch


## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-100, strobe-300, floodlight-600, dual-light-600
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-17 hrs, strobe -6 hrs, floodlight-3, dual-light-3
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 9.9oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650 LUMENS</b>	<b>300 LUMENS</b>	<b>100 LUMENS</b>
	<b>3h</b>	<b>6h</b>	<b>17h</b>
	<b>275m</b>	<b>200m</b>	<b>75m</b>
	<b>18675cd</b>	<b>9687cd</b>	<b>1356cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9924XL	Rechargeable dual switch (flashlight) and single switch (floodlight) polymer dual-light with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black	80392 2
NSR-9924XLD	Rechargeable dual switch (flashlight) and single switch (floodlight) polymer dual-light with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black	80393 9
NSR-9924XLLB	Rechargeable dual switch (flashlight) and single switch (floodlight) polymer dual-light with battery and anti-roll ring - Black	80394 6
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord - 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9600-CHGR5	5 bank charger	80225 3
9914-DW	Direct wire kit	80044 0



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

**XTREME  
LUMENS™**
**Duty/Personal-Size - Xtreme Lumens™ - Metal**

## Duty/Personal-Size Dual-Light™ Flashlight w/ Magnet Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable metal multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 600 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The powerful magnet built into the tail-cap provides for hands-free use. The light is constructed from aircraft-grade 6061 T-6 aluminum and has a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.


**650** Flashlight Lumens

**600** Floodlight Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Powerful tail-cap magnet for hands-free use
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery (included)



TECHNOLOGY

**NSR-9940XL**

NSR-9940XL







# Duty/Personal-Size - Xtreme Lumens™ - Metal

## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Aircraft-grade 6061-T6 aluminum housing, bezel and tail-cap
- Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body switch
- Floodlight - second body switch
- Integrated tail cap magnet for hands-free usage
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*


## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-100, strobe-300, floodlight-600, dual-light-600
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-17 hrs, strobe-6 hrs, floodlight-3, dual-light-3
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 13.2oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650 LUMENS</b>	<b>300 LUMENS</b>	<b>100 LUMENS</b>
	<b>3h</b>	<b>6h</b>	<b>17h</b>
	<b>275m</b>	<b>200m</b>	<b>75m</b>
	<b>18675cd</b>	<b>9687cd</b>	<b>1356cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply

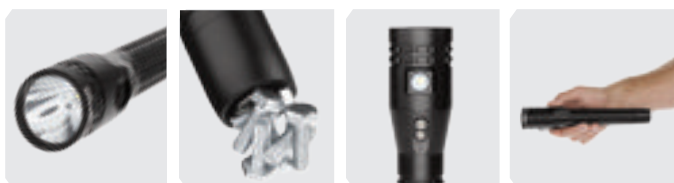

High-efficiency deep parabolic reflector

Hands-free tail cap magnet

Wide-beam floodlight

Dual-switch control

## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9940XL	Rechargeable single switch (flashlight) and single switch (floodlight) metal dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black	80411 0
NSR-9940XLCD	Rechargeable single switch (flashlight) and single switch (floodlight) metal dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black	80412 7
NSR-9940XLLB	Rechargeable single switch (flashlight) and single switch (floodlight) metal dual-light and integrated tail cap magnet with battery and anti-roll ring - Black	80413 4
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord - 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9600-CHGR5	5 bank charger	80225 3
9914-DW	Direct wire kit	80044 0



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

**XTREME  
LUMENS™**
**Duty/Personal-Size - Xtreme Lumens™ - Metal**

# Duty/Personal-Size Dual-Light™ Flashlight Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable metal multi-function duty/personal-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 600 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body and tail switches provide momentary or constant -on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. Both flashlight switches operate in tandem with each other. The second body switch operates the floodlight. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and the bezel is constructed from 316 stainless steel. The housing, tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



TECHNOLOGY

**650** Flashlight  
Lumens

**600** Floodlight  
Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery (included)


**NSR-9944XL**

NSR-9944XL



# Duty/Personal-Size - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Aircraft-grade 6061-T6 aluminum housing/tail cap and 316 stainless steel bezel
- Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - body & tail switch tandem operation
- Floodlight - second body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch



Tail-cap switch

## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-100, strobe-300, floodlight-600, dual-light-600
- Run-time: flashlight high-3 hrs, medium-6 hrs, low-17 hrs, strobe-6 hrs, floodlight-3, dual-light-3
- Recharge time: 4 hours (typical)
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 13.2oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650 LUMENS</b>	<b>300 LUMENS</b>	<b>100 LUMENS</b>
	<b>3h</b>	<b>6h</b>	<b>17h</b>
	<b>275m</b>	<b>200m</b>	<b>75m</b>
	<b>18675cd</b>	<b>9687cd</b>	<b>1356cd</b>

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0
NSR-9944XL	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black	80395 3
NSR-9944XLDLC	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black	80396 0
NSR-9944XLLB	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with battery and anti-roll ring - Black	80397 7
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord - 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9600-CHGR5	5 bank charger	80225 3
9914-DW	Direct wire kit	80044 0



Safety cones



USB charging cable



Spare Lithium-ion rechargeable battery



Five bank charger



Direct wire kit

**XTREME  
LUMENS™**
**Full-Size - Xtreme Lumens™ - Metal**

## Full-Size Dual-Light™ Flashlight Rechargeable - Multi-Function



This Xtreme Lumens™ rechargeable metal multi-function full-size Dual-Light™ flashlight uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 600 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight (any brightness mode) and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and bezel is constructed from 316 stainless steel bezel. The housing, tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.



TECHNOLOGY

**650** Flashlight  
Lumens

**600** Floodlight  
Lumens

- Flashlight/Floodlight/Dual-Light™
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 275 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery (included)


**NSR-9744XL**

NSR-9744XL



# Full-Size - Xtreme Lumens™ - Metal



## FEATURES

- Super-bright Xtreme Lumens™ design
- CREE® LED technology - 50,000 + hours LED life
- Flashlight - floodlight - Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Aircraft-grade 6061-T6 aluminum housing/tail cap and 316 stainless steel bezel
- Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe - Body switch
- Floodlight - Second body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Two body switches

## SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-100, strobe-300, floodlight-600, dual-light-600
- Run-time: flashlight high-4.5 hrs, medium-9 hrs, low-25.5 hrs, strobe-9 hrs, floodlight-4.5, dual-light-4.5
- Recharge time: 6 hours
- Beam distance: 275 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 11.8in, head diameter: 1.6in, handle diameter: 1.2in, weight: 17.5oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>650 LUMENS</b>	<b>300 LUMENS</b>	<b>100 LUMENS</b>
	<b>4h 30min</b>	<b>9h</b>	<b>25h 30min</b>
	<b>275m</b>	<b>200m</b>	<b>75m</b>
	<b>18675cd</b>	<b>9687cd</b>	<b>1356cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9744XL	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Black	80382 3
NSR-9744XLDC	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Black	80383 0
NSR-9744XLLB	Rechargeable dual switch (flashlight) and single switch (floodlight) metal dual-light with battery and anti-roll ring - Black	80384 7
9700-BATT	Replacement Lithium-ion battery	80312 0
9600-USB	USB cord - 27in	80227 7
9600-RCONE	Red safety cone	80226 0
9600-YCONE	Yellow safety cone	80228 4
9600-BCONE	Blue safety cone	80223 9
9600-CHGR5	5 bank charger	80225 3
9914-DW	Direct wire kit	80044 0



Safety cones



Direct wire kit



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable

## Full-Size - Metal

# Full-Size Flashlight

## Rechargeable - Multi-Function



*This rechargeable metal multi-function full-size flashlight uses a CREE® LED rated at 420 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 500 meters. The body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The housing, tail-cap and bezel are made from aircraft-grade 6061-T6 aluminum and have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.*



# 420 Lumens

- 4.25 Hours run-time
- Momentary or constant-on with 3 brightness levels & strobe
- Beam distance rated at 500 meters
- Aircraft-grade 6061-T6 aluminum housing
- Powered by Lithium-ion rechargeable battery

**NSR-9746B**


NSR-9746B



# Full-Size - Metal

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on plus 3 brightness levels & strobe
- Sharp focused beam
- Aircraft-grade 6061-T6 aluminum housing, tail-cap and bezel
- Type III hard anodized finish
- Non-slip grip
- Single body switch
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Body switch

## SPECIFICATIONS

- Lumens: high-420, medium-225, low-45, strobe-400
- Run-time: high-4.25 hrs, medium-10 hrs, low-63 hrs, strobe-8 hrs
- Recharge time: 6 hours
- Beam distance: 500 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 12.8in, head diameter: 2.4in, handle diameter: 1.2in, weight: 22.5oz

FL 1 STANDARD	HIGH	MEDIUM	LOW
	<b>420</b> LUMENS	<b>225</b> LUMENS	<b>45</b> LUMENS
	<b>4h 15min</b>	<b>10h</b>	<b>63h</b>
	<b>500m</b>	<b>330m</b>	<b>150m</b>
	<b>70000cd</b>	<b>27663cd</b>	<b>5726cd</b>
	<b>2m</b>		
	<b>1m</b>		

## INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- 12 V DC power supply



## MODELS/ACCESSORIES

Model	Description	UPC 0 17398
NSR-9746B	Rechargeable single switch metal flashlight with wall/vehicle mountable charger, battery, AC and 12V DC charging cords/black	80240 6
NSR-9746BDC	Rechargeable single switch metal flashlight with wall/vehicle mountable charger, battery, 12V DC charging cord/black	80316 8
NSR-9746BLB	Rechargeable single switch metal flashlight with battery	80317 5
9700-BATT	Replacement Lithium-ion battery	80312 0
9600-USB	USB cord – 27in	80227 7
9700-RCONE	Red safety cone	80313 7
9700-YCONE	Yellow safety cone	80314 4
9700-BCONE	Blue safety cone	80315 1
9850-BRW	Basket weave leather belt ring	98501 7
9850-BRN	Nylon belt ring	98502 4
9850-BRPL	Patent leather belt ring	98503 1
9850-BRSL	Standard leather belt ring	98504 8
9600-CHGR5	5 bank charger	80225 3
9914-DW	Direct wire kit	80044 0



Safety cones



Direct wire kit



Spare Lithium-ion rechargeable battery



Five bank charger



USB charging cable



Belt rings

**Multi-Purpose - Polymer**

**Multi-Function Flashlights**  
**Flashlight-Floodlight-Dual-Light™**

These non-rechargeable multi-function Dual-Light™ flashlights use a single body switch offering the user a choice of flashlight, floodlight or dual-light operation. The compact oval design makes them convenient to use and carry. Their water resistant housings are made from engineered polymer and have a soft touch finish. The 1224 models have an integrated body magnet for hands-free use. Power comes from 2 included AAA batteries (1206) and 4 included AAA batteries (1224).

Flashlight



Floodlight



Dual-Light



**65** Flashlight Lumens

**100** Floodlight Lumens

**125** Dual-Light™ Lumens

- 5 Hours run-time
- Integrated hands-free magnet (1224)
- Focused-beam flashlight
- Wide-area non-focused floodlight

**NSP-1224R**

**NSP-1224B**



**NSP-1206R**

**NSP-1206B**

NSP-1206B



NSP-1206R



NSP-1224B



NSP-1224R






# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- Bright LEDs – 35,000 + hours LED life
- Flashlight – floodlight – Dual-Light™
- Soft-touch grip
- Water resistant
- Non-slip grip
- Comfortable oval shape
- Impact & chemical resistant polymer housing
- Integrated body magnet (1224 only)
- Powered by 4 AAA batteries (1224) & 2 AAA batteries (1206) included
- Limited 1 Year Warranty \*\*




High-efficiency deep parabolic reflector (1224)

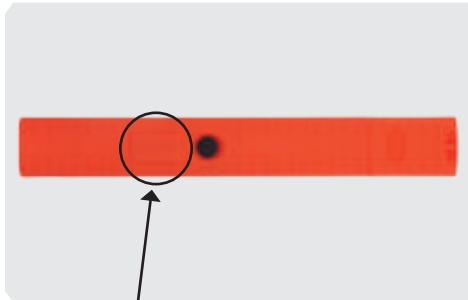

Integrated magnet with single switch control for flashlight floodlight and dual-light (1224)



Four bright LEDs (1206)

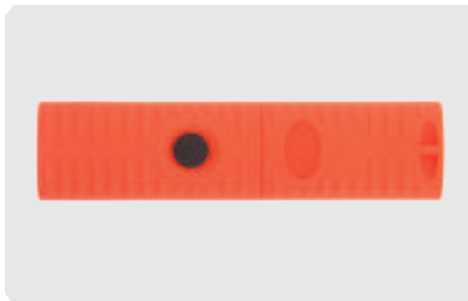


Single switch control for flashlight floodlight and dual-light (1206)

Model	UPC 0 17398
NSP-1206B	80355 7
NSP-1206R	80356 4
NSP-1224B	80357 1
NSP-1224R	80358 8


## NSP-1206R-SPECIFICATIONS

- Lumens: flashlight-9, floodlight-16, dual-light-17
- Run-time: flashlight-5 hrs, floodlight-7 hrs, dual-light-4 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 4.4in, Width: 1.1 x 0.8in, Weight: 1.8oz




## NSP-1206B-SPECIFICATIONS

- Lumens: flashlight-9, floodlight-16, dual-light-17
- Run-time: flashlight-5 hrs, floodlight-7 hrs, dual-light-4 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 4.4in, Width: 1.1 x 0.8in, Weight: 1.8oz




## NSP-1224R-SPECIFICATIONS

- Lumens: flashlight-65, floodlight-100, dual-light-125
- Run-time: flashlight-5 hrs, floodlight-2.5 hrs, dual-light-2.25 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 7.9in, Width: 1.1 x 0.8in, Weight: 5.2oz



## NSP-1224B-SPECIFICATIONS

- Lumens: flashlight-65, floodlight-100, dual-light-125
- Run-time: flashlight-5 hrs, floodlight-2.5 hrs, dual-light-2.25 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 7.9in, Width: 1.1 x 0.8in, Weight: 5.2oz



## INCLUDED

- Flashlight
- 2 AAA batteries (1206) & 4 AAA batteries (1224)



## Multi-Purpose - Polymer

### Multi-Function Flashlight Flashlight-Floodlight-Dual-Light™

Flashlight



Flood High



Flood Low



Dual-Light



*This non-rechargeable multi-function Dual-Light™ flashlight features a focused-beam flashlight for distance illumination and a non-focused floodlight for close-up lighting. With its dual-switch design, the user can select between flashlight as well as full-power or half-power floodlight. Additionally this light offers the ability to turn both the flashlight and the floodlight on at the same time for even greater functionality. A hands-free dual-angle stand, clip-on magnet and impact bumpers are included. Power comes from 4 included AA batteries.*



TECHNOLOGY

**150** Flashlight  
Lumens

**120/60** Floodlight  
Lumens

**270** Dual-Light™  
Lumens

- Dual switch function
- Focused-beam flashlight
- Wide-area unfocused floodlight
- Dual-Light™ (flashlight and floodlight together)

**NSP-1260**



NSP-1260



# Multi-Purpose - Polymer

## FEATURES

- Bright LEDs – 35,000 + hours LED life
- Flashlight – floodlight – Dual-Light™
- Focused beam flashlight
- Wide-beam unfocused floodlight
- Dual-Light (flashlight & floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip
- Comfortable oval shape
- Soft touch finish
- Dual body switches
- Water resistant
- Impact & chemical resistant
- Powered by four premium AA alkaline batteries (included)
- Limited 1 Year Warranty \*\*

## SPECIFICATIONS

- Lumens: flashlight-150, full-power floodlight-120, half-power floodlight-60, dual-light-270
- Run-time: flashlight-10 hrs, full-power floodlight-4 hrs, half-power floodlight-10 hrs, dual-light-3 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 10.9in, width: 1.3 x .9in, weight: 8.2oz

## INCLUDED

- 4 AA premium alkaline batteries
- Impact bumpers & clip-magnet
- Hands-free dual-angle stand



## MODELS ACCESSORIES

Model	Description	UPC 0 17398
NSP-1260	61 LEDs	80030 3
1160-BASE	Large magnetic base	80026 6
1200-MAGNET	Clip-on magnet	70004 7
1260-BUMPERS	Impact Bumpers	80135 5
1260-RCONE	Red safety cone	80085 3
1260-YCONE	Yellow safety cone	80086 0



Dual switch control with impact bumpers (included)



Clip-magnet (included)



High-efficiency deep parabolic reflector



Hands-free stand (included)



## Multi-Purpose - Polymer

### Dual-Switch Dual-Light™ Flashlights Non-Rechargeable - Polymer

Flashlight



Floodlight



Dual-Light



These non-rechargeable dual-switch Dual-Light™ flashlights each have two body switches offering the user a choice of flashlight, floodlight or dual-light operation. Their compact oval design makes them convenient to use and carry. Their water resistant housings are made from engineered polymer and have a soft touch finish. The 1400B/R/T each have a white flashlight and a white floodlight. The 1402 has a white flashlight and a red floodlight, and the 1404 has a white flashlight and a green floodlight. All models include a removable pocket/belt clip. Power comes from 2 included AAA batteries.



TECHNOLOGY

**60** Flashlight Lumens

**25** Floodlight Lumens

**90** Dual-Light™ Lumens



- 3 Hours run-time
- Focused-beam flashlight
- Wide-area non-focused floodlight
- Floodlight color: White (1400), Red (1402) & Green (1404)

**NSP-1400B**

NSP-1400R



NSP-1400B



NSP-1400T



NSP-1402B



NSP-1404B



**NSP-1400R**

**NSP-1400T**

**NSP-1402B**

**NSP-1404B**

# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED
- Flashlight – floodlight – Dual-Light™
- Focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Red floodlight (1402) and green floodlight (1404) for night vision preservation
- Dual-Light (flashlight and white floodlight on at the same time) for maximum versatility
- Engineered polymer housing
- Dual body switches
- Non-slip grip
- Water resistant
- Impact & chemical resistant
- Powered by 2 AAA premium batteries (included)
- Limited Lifetime Warranty\*



High-efficiency deep parabolic reflector



Dual body switches

## INCLUDED


- Flashlight
- 2 AAA batteries
- Removable pocket clip



Model	UPC 0 17398
NSP-1400B	80376 2
NSP-1400R	80377 9
NSP-1400T	80378 6
NSP-1402B	80379 3
NSP-1404B	80380 9


## NSP-1400B SPECIFICATIONS

- Lumens: flashlight-60, floodlight-25, dual-light-90
- Run-time: flashlight-3 hrs, floodlight-3 hrs, dual-light-1.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz




## NSP-1400R SPECIFICATIONS

- Lumens: flashlight-60, floodlight-25, dual-light-90
- Run-time: flashlight-3 hrs, floodlight-3 hrs, dual-light-1.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz




## NSP-1400T SPECIFICATIONS

- Lumens: flashlight-60, floodlight-25, dual-light-90
- Run-time: flashlight-3 hrs, floodlight-3 hrs, dual-light-1.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz




## NSP-1402B SPECIFICATIONS

- Lumens: flashlight-60, floodlight-15
- Run-time: flashlight-3 hrs, floodlight-2.8 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz



## NSP-1404B SPECIFICATIONS

- Lumens: flashlight-60, floodlight-10
- Run-time: flashlight-3 hrs, floodlight-5.5 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 5.3in, diameter: 0.8 x 1.1in, weight: 2.2oz



**Multi-Purpose - Polymer**

**Dual-Light™ Flashlights  
w/ Dual Magnets**

These non-rechargeable Dual-Light™ flashlights use a CREE® LED rated at 130 lumens paired with a high-efficiency deep parabolic reflector, creating a flashlight beam with an effective range of 181 meters (over 590 feet). Additionally, built into the handle is a 110 lumen floodlight. Unlike the flashlight beam, the light coming out of the floodlight does not have a reflector so the light spreads out in a wide, even, unfocused pattern of light...perfect for lighting up things that are close. The waterproof design, in combination with an impact and chemical resistant engineered polymer housing, make these tough little lights, one of the best values around. Additionally, the integrated magnets located in the base of the handle and pocket clip, provide for almost limitless hands-free usage.

The flashlight is actuated by means of the top body switch providing both momentary and constant-on functionality. The floodlight is operated using the bottom button. Additionally, both lights can be turned on at the same time for even more versatile lighting options. Now you have a light for distance and one for close up work.

Flashlight



Floodlight



Dual-Light



TECHNOLOGY

**130** Flashlight Lumens

**110** Floodlight Lumens

**235** Dual-Light™ Lumens

- 9.5 Hours run-time
- Two Integrated hands-free magnets
- Beam distance rated at 181 meters



**NSP-2422R**

**NSP-2422B**

NSP-2422R



NSP-2422B




# Multi-Purpose - Polymer

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility
- Powerful integrated magnets built into the base and clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Powered by 3 AA premium batteries (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-130, floodlight-110, dual-light-235
- Run-time: flashlight-9.5 hrs, floodlight-10.5 hrs, dual-light-6 hrs
- Beam distance: 181 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1 x 1.3in, weight: 6.4oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard
- 3 AA batteries



Built in pocket/belt clip with integrated magnet



Integrated magnet built into the handle



Hands-free magnet in base



Hands-free magnet in pocket clip



Dual body switches



High-efficiency deep parabolic reflector



Wide-beam floodlight



Model	UPC 0 17398
NSP-2422B	80352 6
NSP-2422R	80353 3

# Multi-Purpose - Rechargeable

## Multi-Purpose Work Light Rechargeable

Spotlight



Floodlight



Dual-Light



This dual-switch rechargeable Multi-Purpose Work Light is one of the most versatile lights available. It is actually two lights in one...a spotlight and a floodlight. Rated at 200 lumens, the spotlight beam on this light puts a beam of light exactly where you need it. This unique work light also has a non-focused 170 lumens floodlight built into the handle. Because the floodlight does not have a reflector, the light spreads out in a wide even pattern of light expressly for the purpose of lighting up areas that are close by. Now you have two completely different patterns of light for whatever work needs to be done...a spotlight for locating the problem, and a floodlight for lighting up the area while the problem is being fixed. You can even turn both lights on at the same time for even more lighting options. The ergonomic shape of the handle makes it a pleasure to hold, and the flat-bottom design means it will stand up on virtually any flat surface. For additional hands-free options, the work light includes a Hook/Prop Stand. It can be used to hang the work light up, and because it can rotate 360 degrees around the body of the light, the light can be pointed to exactly where it's needed. Power comes from an integrated Nickel Metal Hydride battery.

**200** Spotlight  
Lumens

**170** Floodlight  
Lumens

**325** Dual-Light™  
Lumens

- 3 Hours run-time
- 170 Meter beam distance
- Integrated Nickel Metal Hydride (NiMH) battery



TECHNOLOGY

NSR-2492

NSR-2492






# Multi-Purpose - Rechargeable

## FEATURES

- Three lighting modes: spotlight, floodlight & Dual-Light™ (both the spotlight & floodlight at the same time)
- Dual-switch design: top – spotlight, bottom - floodlight
- Engineered polymer housing
- Ergonomic shape to the handle makes it a pleasure to hold and use
- Flat bottom base make it possible to stand the light up for hands-free use
- The integrated hook/prop stand further increase the hands-free options
- Bright white LEDs with a 35,000 hour life
- Limited 1 Year Warranty \*\*

## SPECIFICATIONS

- Lumens: spotlight-200, floodlight-170, dual-light-325
- Run-time: spotlight-3 hrs, floodlight-2.5 hrs, dual-light-1.5 hrs
- Beam distance: 170 m
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 11.5 in, handle 1.7 in, bezel: 1.8 in, weight: 10.1 oz




## INCLUDED


- Worklight
- Integrated Nickel Metal Hydride battery
- Hook/Prop Stand
- AC power supply/charger
- 12 V DC power supply/charger



Integrated hook/prop stand



Push-button control



Flat bottom base



Ergonomic shape handle

Model	UPC 0 17398
NSR-2492	12492 8

**Multi-Purpose - Rechargeable**

**Multi-Purpose Work Lights  
Rechargeable**

This rechargeable all LED Work Light has both a spotlight and a floodlight built in. The spotlight, located in the base of the handle, is rated at 32 Lumens. It's perfect for putting a narrow beam of light into a specific area. The floodlight, rated at 230 Lumens, is designed for lighting up a large area. The idea is simple, use the spotlight to find the problem, and the floodlight to light up the area when fixing the problem. The work light has two magnets built in...one at the balance point in the middle of the handle, and the other at the tip of the light. The flat-bottom design of the handle means the light will stand up on most flat surfaces, and the octagonal shape to the handle keeps the floodlight aimed in the correct direction when you lay the light on its side. Further adding to the work light's hands-free features is the detachable magnetic hook. It can be attached to either integrated body magnet and rotated 360 degrees. The integrated Nickel Metal Hydride battery can be recharged with the included AC or DC power supply/charger.

Spotlight



Floodlight



**32** Spotlight  
Lumens

**230** Floodlight  
Lumens

- 3 Hours run-time
- Dual Integrated Magnets & Hook
- Single Rocker Switch
- Powered by integrated Nickel Metal Hydride rechargeable battery



**NSR-2166R**

**NSR-2166B**

**SLR-2166**

NSR-2166R



NSR-2166B



SLR-2166



# Multi-Purpose - Rechargeable

## FEATURES: ALL MODELS

- Light has 60 LEDs rated at 230 lumens arranged in a floodlight pattern and 6 LEDs in the base of the handle rated at 32 lumens serving as a spotlight
- Two built-in magnets, one at the tip of the light and the other at the mid-point of the body for hands-free use
- Magnetic hook can be attached to either of the built-in magnets and can be rotated 360 degrees for even more hands-free versatility
- Octagonal body design keeps the light in place when laid on its side
- Flat bottom design allows the light to stand up
- Water Resistant
- Impact & chemical resistant
- Integrated Nickel Metal Hydride (NiMH) battery
- Includes both AC & DC power supply/charger
- Limited 1 Year Warranty \*\*

## SPECIFICATIONS

- Lumens: floodlight 230, spotlight 32
- Run-time: floodlight 3 hrs, spotlight 18 hrs
- Recharge time: 8 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 14.3in, head diameter: 1.4in, handle diameter: 1.8in, weight: 16oz

## INCLUDED


- Worklight with built-in dual magnets (body & tip)
- Integrated Nickel Metal Hydride battery
- Removeable hook
- AC power supply/charger
- 12 V DC power supply/charger



6 LED Spotlight



Magnet on top with removable hook

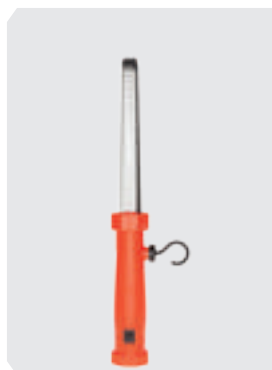

Magnet on body with removable hook



Using the floodlight



Using the spotlight

Model	UPC 0 17398
NSR-2166B	80362 5
NSR-2166R	80363 2
SLR-2166	80025 9

## Multi-Purpose - Rechargeable

# Under Hood Work Light Rechargeable

The SLR-2120 Under Hood Work Light, is purpose built as an all LED, hands-free floodlight for the automotive enthusiast. This rechargeable work light has an adjustable cradle with a pair of spring-loaded, foam-covered grippers that will extend 48"-77" to fit on the underside of virtually any automobile hood. The light bar can then be rotated 360 degrees to place the lighting exactly where it's needed. The 2120 has two brightness modes: Full-power (1200 Lumens) and Half-power (650 Lumens). The dual on/off buttons, one located on each of the two handles, operate in tandem with each other. One press of either button turns the light on in Full-power Mode, a second press and you're in Half-power Mode and then a third press, turns the light off. The light bar can easily be removed from the cradle. Each of the handles can independently rotate up or down through more than 200 degrees range of motion. The flat surface at the end of each handle can serve as a stand for the light bar. Additionally, there are 3 flush-mounted magnets located in the end of each handle. This allows one or both ends of the light bar to be attached to virtually any flat metal surface. Each handle also has an integrated recessed hook that can swivel 360 degrees making it possible to hang the light bar up. The included AC & DC Power Supplies/Chargers can be used to power the 2120 during use and/or as a way to recharge the unit when it's not in use. Requiring only 6 hours to charge, the SLR-2120 will run for 4.5 hours in Full-power Mode, and 8.5 hours when operating in Half-power Mode.

# 1200 Lumens

- **Two brightness modes - full-power & half-power**
- **Dual spring-loaded grippers with 48"-77" capacity built into the cradle**
- **Light bar can be rotated 360 degrees in the cradle or removed all together**
- **Light bar handles have 3 magnets each and an integrated hook for added hands-free functionality**
- **Integrated rechargeable Lithium-ion battery - no recharge memory effect**



**SLR-2120**

SLR-2120



# Multi-Purpose - Rechargeable

## FEATURES

- All LED construction
- Two brightness modes - full-power & half-power
- Dual spring-loaded grippers with 48"-77" capacity built into the cradle
- Light bar can be rotated 360 degrees in the cradle or removed all together
- Light bar handles have 3 magnets each and an integrated hook for added hands-free functionality
- Light bar handles rotate up and down through more than 200 degrees of range
- Dual on/off buttons, one located in each handle operate in tandem
- Integrated rechargeable Lithium-ion battery - no recharge memory effect
- Includes AC & DC power supplies/chargers
- Limited 1 Year Warranty \*\*

## SPECIFICATIONS

- Lumens: high-brightness: 1200, low-brightness: 650
- Run-time: high-brightness-4.5 hrs, low-brightness-8.5 hrs
- Recharge time: 6 hrs
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 48.5 in, Width: 4.4 in, Depth: 6.5 in, Weight: 5.5 lbs

## INCLUDED

- Worklight
- Light bar cradle
- AC & DC power supplies/charger



Each handle can independently rotate up or down



Three magnets on each end with spring-loaded gripper



Dual on/off buttons operate in tandem on each handle



Recharges in 6 hours

<b>Model</b>	<b>UPC 0 17398</b>
SLR-2120	80172 0

# Headlamps

## Dual-Light™ Headlamps

NSP-4602B

**30 Lumens**  
**Dual-Light™**

**9 Lumens**  
Spotlight

**30 Lumens**  
Floodlight




NSP-4604B

**80 Lumens**  
**Dual-Light™**

**55 Lumens**  
Spotlight

**40 Lumens**  
Floodlight



- **Single switch control**
- **Engineered polymer housing**
- **Powered by 3 AAA batteries (included)**



These non-rechargeable Dual-Light™ headlamps each feature a multi-position tilt head design and include an elastic head strap with a non-slip lining. The top mounted switch provides user selectable spotlight/floodlight/dual-light operation. Power comes from 3 AAA premium batteries (included).



TECHNOLOGY

**NSP-4602B**



TECHNOLOGY

**NSP-4604B**

NSP-4602B

NSP-4604B



# Headlamps



## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – floodlight – Dual-Light™
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (spotlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*


## INCLUDED

- Headlamp
- 3 premium alkaline AAA batteries
- Non-slip elastic head strap




## NSP-4602B SPECIFICATIONS

- Lumens: spotlight-9, floodlight- 30, dual-light-30
- Run-time: spotlight-40 hrs, floodlight-11 hrs, dual-light-16 hrs
- Beam distance: 18 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.3oz



## NSP-4604B SPECIFICATIONS

- Lumens: spotlight-55, floodlight-40, dual-light-80
- Run-time: spotlight-6 hrs, floodlight-8 hrs, dual-light-5 hrs
- Beam distance: 50 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.3oz



Model	UPC 0 17398
NSP-4602B	80186 7
NSP-4604B	80187 4



# Headlamps

## Multi-Function Headlamps

NSP-4608B

**115 Lumens**  
**Dual-Light™**

**100/60 Lumens**  
**Spotlight**

**90/50 Lumens**  
**Floodlight**

Spot High Spot Low Flood High



Flood Low Dual



These non-rechargeable multi-function headlamps each feature a multi-position tilt head design and include an elastic head strap with a non-slip lining. The top mounted dual switches provide high/low-brightness spotlight and high/low-brightness floodlight (4608), and high/low-brightness spotlight and white/red/green floodlight (4610) operation. Additionally, the spotlight & white floodlight settings on the 4608 can be selected simultaneously for even greater functionality. Power comes from 3 AAA premium batteries (included).

NSP-4610B


**150/80 Lumens**  
**Spotlight**

**100 Lumens**  
**White Floodlight**

**9 Lumens**  
**Red Floodlight**

**18 Lumens**  
**Green Floodlight**

Spot High Spot Low White Flood



Red Flood Green Flood



TECHNOLOGY

**NSP-4608B**



**NSP-4610B**



- Beam distance rated at 77/60 meters
- Dual-brightness spotlight and multiple brightness/color floodlight modes
- Engineered polymer housing
- Powered by 3 AAA batteries (included)

NSP-4608B



NSP-4610B





# Headlamps



## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight – high/low-brightness floodlight – Dual-Light™ (4608)
- High/low-brightness spotlight – white/red/green floodlight (4610)
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Colored floodlight for night vision preservation (4610)
- Dual-Light (spotlight & white floodlight mode at same time, 4608) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*

## INCLUDED

- Headlamp
- 3 Premium alkaline AAA batteries
- Elastic non-slip head strap



Model	UPC 0 17398
NSP-4608B	80236 9
NSP-4610B	80237 6



## NSP-4608B SPECIFICATIONS

- Lumens: high spotlight-100, low spotlight-60, high floodlight-90, low floodlight-50, dual-light-115
- Run-time: high spotlight-5 hrs, low spotlight-13.5 hrs, high floodlight-4.25 hrs, low floodlight-13.75 hrs, dual-light-3.5 hrs
- Beam distance: 77 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

FL 1 STANDARD	HIGH	LOW
	100 LUMENS	60 LUMENS
	5h	13h 30min
	77m	55m
	1506cd	775cd
	2m	1m

## NSP-4610B SPECIFICATIONS

- Lumens: high spotlight-150, low spotlight-80, white floodlight-100, red floodlight-9, green floodlight-18,
- Run-time: high spotlight-4 hrs, low spotlight-8 hrs, white floodlight-4 hrs, red floodlight-25 hrs, green floodlight-22.5 hrs
- Beam distance: 60 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

FL 1 STANDARD	HIGH	LOW
	150 LUMENS	80 LUMENS
	4h	8h
	60m	43m
	1377cd	667cd
	2m	1m

# Headlamps

## Dual-Light™ Multi-Function Headlamp


This headlamp is the ideal hands-free lighting tool when working in a location where maximum lighting options and maximum run-times are a requirement. The top mounted dual switches provide white spotlight, high & low-brightness white floodlight, red floodlight and Dual-Light™ control. With the battery compartment located in the back, optimal balance is achieved whether the light is worn directly on the head or on a hard hat. The light includes two straps...the heavy-duty rubber head strap for use on a hard hat and the non-slip elastic head strap for use on a ball cap or directly on the user's head. Power is supplied from 3 included AA batteries.

**175 Lumens**  
Dual-Light™

**100 Lumens**  
Spotlight

**90/20 Lumens**  
White Floodlight

**18 Lumens**  
Red Floodlight



- Beam distance rated at 140 meters
- Spotlight, dual brightness white/red floodlight modes
- Engineered polymer housing
- Powered by 3 AA Premium batteries (included)


**NSP-4612B**



NSP-4612B



# Headlamps

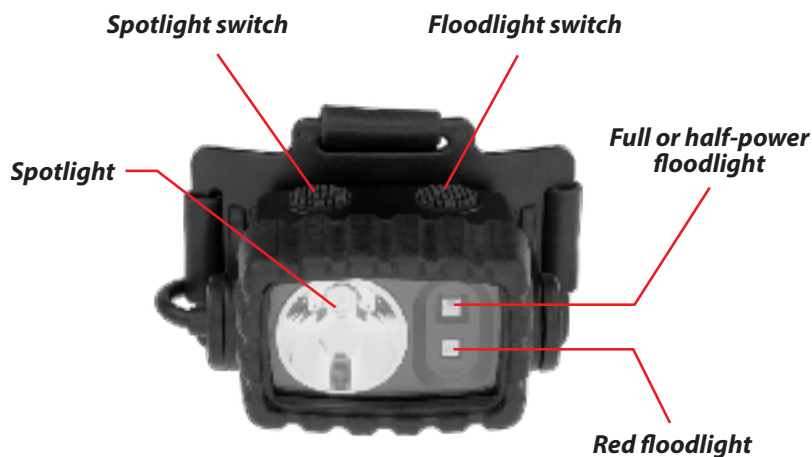


## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight - high/low-brightness white floodlight - red floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Red floodlight for night vision preservation
- Dual-Light™ (spotlight and white floodlight on at the same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: spotlight-100, high floodlight-90, low floodlight-20, red floodlight-18, dual-light-175
- Run-time: spotlight-18 hrs, high floodlight-13.5 hrs, low floodlight-75 hrs, red floodlight-37 hrs, dual-light-3.5 hrs
- Beam distance: 140 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz



## INCLUDED

- Headlamp
- 3 Premium alkaline AA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap



Model	UPC 0 17398
NSP-4612B	80351 9



Heavy-duty rubber head strap

# Intrinsically Safe

## Polymer Penlight



*This non-rechargeable penlight is cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present. They are ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 2 AAA premium batteries (included).*

**INTRINSICALLY SAFE**

Flashlight



**30** Lumens

- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present.
- Engineered polymer housing
- Powered by AAAA batteries



**XPP-5410G**

XPP-5410G



# Intrinsically Safe

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Single tail switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Powered by 2 AAA batteries (included)
- Limited Lifetime Warranty\*



XPP-5410G




High-efficiency deep parabolic reflector



Push-button tail-cap switch

## XPP-5410G SPECIFICATIONS

- Lumens: 30
- Run-time: 18 hrs
- Beam distance: 40 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 5.8in, head diameter: 0.9in, handle diameter: 0.7in, weight: 1.9oz



## INCLUDED

- Flashlight
- 2 AAA premium alkaline batteries

## SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present.

Patent 7,738,229

Permissible XPP-5410 Flashlight Assembly

**MSHA** APPROVAL No. 20-A140006-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: The Model XPP-5410 is MSHA approved for use with Energizer (Type E92), two Energizer (Type EN92), and Duracell (Type MX2400), Duracell (PC2400), and Duracell (EN92) batteries only. Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types. The Model XPP-5410 must not be opened in area where permissibility required.

 Intertek ID 4001184 INTRINSICALLY SAFE SECURITE INTRINSEQUE	CLASS I DIV 1 GRPS A-D T3	Ex ia op is I Ma
	CLASS II & III DIV 1 GRPS E-G T135C	Ex ia op is IIC T3 Ga
	CLASS I ZONE 0 AEx ia IIC T3 Ga	Intertek ITS 13 ATEX27839X
	CLASS I ZONE 0 Ex ia IIC T3 Ga	IECEx ITS 14.0036X
	Ⓜ I M 1 Ex ia op is I Ma	-20°C ≤ Tamb ≤ +40°C
	Ⓜ II 1 G Ex ia op is IIC T3 Ga	1.5V/Cell AAA Alkaline

**CE** 0359

<b>Conforms to:</b>	<b>Certified to:</b>
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26	CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5410G	80298 7

# Intrinsically Safe

## Polymer Penlight



*This non-rechargeable penlight is cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. It is ultra-compact and super slim with a powerful light output designed to illuminate very tight spaces. The tail-cap switch provides momentary or constant-on functionality. Power comes from 3 AAAA premium batteries (included).*

**INTRINSICALLY SAFE**

Flashlight



**50** Lumens

- **cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present.**
- **Engineered polymer housing**
- **Powered by AAA batteries**



**XPP-5412G**

XPP-5412G




# Intrinsically Safe

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Single tail switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Powered by 3 AAAA batteries (included)
- Limited Lifetime Warranty\*

## XPP-5412G SPECIFICATIONS

- Lumens: 50
- Run-time: 13.75 hrs
- Beam distance: 50 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 6.8in, head diameter: 0.6in, handle diameter: 0.5in, weight: 1.5oz



## INCLUDED

- Flashlight
- 3 AAAA premium alkaline batteries

## SAFETY RATING

cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present.

*Patent 7,738,229*




XPP-5412G

High-efficiency deep parabolic reflector

Push-button tail-cap switch

Nightstick 5412 Penlight

 ID 4001184  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia op is I Ma  
CLASS II & III DIV1 GRPS E-G T135C Ex ia op is IIC T3 Ga  
CLASS I ZONE 0 AEx ia IIC T3 Ga Intertek ITS 13 ATEX27839X  
CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ITS 14.0036X  
© I M 1 Ex ia op is I Ma -20°C ≤ Tamb ≤ +40°C  
© II 1 G Ex ia op is IIC T3 Ga 1.5V/Cell AAAA Alkaline

CE 0359

**Conforms to:**  
ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

<b>Model</b>	<b>UPC 0 17398</b>
XPP-5412G	80299 4

# Intrinsically Safe

## Polymer Flashlights



These non-rechargeable flashlights are cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present. They each use a CREE® LED rated at 140 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 180 meters. The single body switch provides momentary or constant-on functionality. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE**



Flashlight



# 140 Lumens

- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present.
- Beam distance rated at 180 meters
- Engineered polymer housing



**XPP-5420G**

**XPP-5420B**

XPP-5420G

XPP-5420B





# Intrinsically Safe

## FEATURES: ALL MODELS

- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Engineered polymer housing
- Non-slip grip
- Single body switch
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Available in black & green
- Limited Lifetime Warranty\*



Built in pocket/belt clip




Single body switch



High-efficiency deep parabolic reflector

## SPECIFICATIONS

- Lumens: 140
- Run-time: 14 hrs
- Beam distance: 180 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 7.3oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

## SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present

Patent 7,738,229



Permissible Nightstick 5420 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.  
 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 4) The Model Nightstick 5420 must not be opened in areas where permissibility is required.

 ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	CLASS I DIV 1 GRPS A-D T3	Ex ia I Ma
	CLASS II & III DIV 1 GRPS E-G T135C	Ex ia IIC T3 Ga
	CLASS I ZONE 0 AEx ia IIC T3 Ga	Intertek ITS 13 ATEX27837X
	CLASS I ZONE 0 Ex ia IIC T3 Ga	IECEX ETL 13.0026X
I I M 1 Ex ia I Ma II 1 G Ex ia IIC T3 Ga	-20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline	

CE 0359

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5420G	80091 4
XPP-5420B	80092 1

**Intrinsically Safe**

**Polymer Dual-Light™ Flashlights**



These non-rechargeable Dual-Light™ flashlights are cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present. They each use a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provide momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE**

Flashlight



Floodlight



Dual-Light



**120** Flashlight Lumens

**120** Floodlight Lumens

**240** Dual-Light™ Lumens

- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present.
- Flashlight / Floodlight / Dual-Light™
- Beam distance rated at 170 meters
- Engineered polymer housing



**XPP-5422B**

**XPP-5422G**




# Intrinsically Safe

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Available in black & green
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, dual-light-240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, dual-light-4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

## SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present

Patent 7,738,229



Built in pocket/belt clip

Dual body switches

High-efficiency deep parabolic reflector

Wide-beam floodlight



Permissible Nightstick 5422 Flashlight/Floodlight  
**MSHA** APPROVAL No. 20-A130001-0  
 TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY  
 WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.  
 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 4) The Model Nightstick 5422 must not be opened in areas where permissibility is required.

 Intertek ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE	CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga Ⓜ I M 1 Ex ia I Ma Ⓜ II 1 G Ex ia IIC T3 Ga	Ex ia I Ma Ex ia IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ETL 13.0026X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline
	CE 0359	

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5422G	80093 8
XPP-5422B	80094 5

**Intrinsically Safe**

**Polymer Dual-Light™ Flashlight w/ Dual Magnets**



Flashlight



Floodlight



Dual-Light



This non-rechargeable Dual-Light™ flashlight with dual magnets is cETLus, ATEX and IECEx listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present. It uses a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provides momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Additionally, the integrated magnets located in the base of the handle and pocket clip, provide for almost limitless hands-free usage. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE**



TECHNOLOGY

**XPP-5422GM**

**120** Flashlight Lumens  
**120** Floodlight Lumens  
**240** Dual-Light™ Lumens

- cETLus, ATEX, and IECEx listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present.
- Flashlight / Floodlight / Dual-Light™
- Two Integrated hands-free magnets
- Beam distance rated at 170 meters



Available Early Q2

XPP-5422GM




# Intrinsically Safe

## FEATURES: ALL MODELS

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility
- Powerful integrated magnets built into the base and clip for multiple hands-free options
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Limited Lifetime Warranty\*

## SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, dual-light-240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, dual-light-4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz



## INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

## SAFETY RATING

cETLus, ATEX, and IECEx listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present

Patent 7,738,229




Built in pocket/belt clip with integrated magnet

Integrated magnet built into the handle

High-efficiency deep parabolic reflector

Wide-beam floodlight

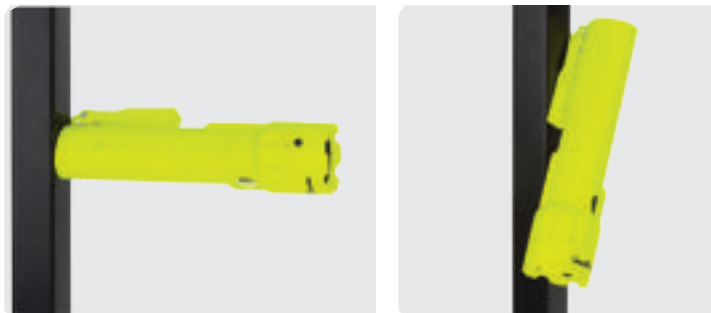

Hands-free magnet in base

Hands-free magnet in pocket clip

 Intertek ID 4002026 INTRINSICALLY SAFE SECURITE INTRINSEQUE	CLASS I DIV 1 GRPS A-D T3 CLASS II & III DIV 1 GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga	Ex ia I Ma Ex ia IIC T3 Ga Intertek ITS 13 ATEX27837X IECEx ETL 13.0026X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AA Alkaline
	CE 0359	
<b>Conforms to:</b> ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11 ANSI/ISA 60079-26	<b>Certified to:</b> CAN/CSA STD C22.2 No 157 CAN/CSA STD C22.2 No 60079-0 CAN/CSA STD C22.2 No 60079-11 CSA STD C22.2 No 25	

Model	UPC 0 17398
XPP-5422GM	80448 6

# Intrinsically Safe

## Dual-Function Headlamps



These non-rechargeable dual-function headlamps are cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. The headlamps each feature a multi-position tilt head design and include an elastic head strap with a non-slip lining and a heavy-duty rubber head strap for use on a hard hat. The top mounted switch provides user selectable high or low brightness spotlight operation. Power comes from 3 AAA premium batteries (included).

**INTRINSICALLY SAFE**



XPP-5450G

**60/40 Lumens  
Spotlight**

Spot High Spot Low



XPP-5452G

**115/65 Lumens  
Spotlight**

Spot High Spot Low



**XPP-5450G**

**XPP-5452G**

- cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present.
- High/low-brightness spotlight
- 80/92 Meter beam distance
- Engineered polymer housing



XPP-5450G

XPP-5452G



# Intrinsically Safe

## FEATURES: ALL MODELS


- CREE® LED technology – 50,000 + hours LED life
- High-brightness spotlight, low-brightness spotlight
- Focused spotlight beam for distance illumination
- Engineered polymer housing
- Single switch located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present.

Patent 7,738,229

**Nightstick 5450 Headlamp**

 ID 4001184  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga  
CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27854X  
CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ETL 13.0031X  
CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C  
Ⓢ II 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline


CE 0359

**Conforms to:** ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26  
**Certified to:** CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25



Heavy-duty rubber head strap

**Nightstick 5452 Headlamp**

 ID 4001184  
INTRINSICALLY SAFE  
SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia IIC T3 Ga  
CLASS II & III GRPS E-G T135C Intertek ITS 13 ATEX27854X  
CLASS I ZONE 0 AEx ia IIC T3 Ga IECEx ETL 13.0031X  
CLASS I ZONE 0 Ex ia IIC T3 Ga -20°C ≤ Tamb ≤ +40°C  
Ⓢ II 1 G Ex ia IIC T3 Ga 1.5V/Cell AAA Alkaline

CE 0359

**Conforms to:** ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26  
**Certified to:** CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5450G	80300 7
XPP-5452G	80301 4






High/Low-brightness spotlight switch



Spotlight

## XPP-5450G SPECIFICATIONS






- Lumens: high spotlight-60, low spotlight-40
- Run-time: high spotlight-13.5 hrs, low spotlight-22.75 hrs
- Beam distance: 80 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.5oz

FL 1 STANDARD	HIGH	LOW
	60 LUMENS	40 LUMENS
	13h 30min	22h 45min
	80m	65m
	1615cd	1076cd
	2m	1m



## XPP-5452G SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-65
- Run-time: high spotlight-4.5 hrs, low spotlight-13 hrs
- Beam distance: 92 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.4in, height: 1.9in, depth: 1.8in, weight: 3.5oz

FL 1 STANDARD	HIGH	LOW
	115 LUMENS	65 LUMENS
	4h 30min	13h
	92m	67m
	2152cd	1141cd
	2m	1m



## INCLUDED

- Headlamp
- 3 Premium alkaline AAA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

**Intrinsically Safe**

**Multi-Function Dual-Light™ Headlamp**




This non-rechargeable multi-function Dual-Light™ headlamp is cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present. This headlamp features a multi-position tilt head design and includes an elastic head strap with a non-slip lining and a heavy-duty rubber head strap for use on a hard hat. The dual top mounted switches provide user-selectable high or low-brightness spotlight, high or low-brightness floodlight operation and our exclusive Dual-Light design...the ability to turn on both the spotlight and the floodlight at the same time for maximum user safety and lighting versatility.

**INTRINSICALLY SAFE**

**160 Lumens**  
**Dual-Light™**

**115/60 Lumens**  
**Spotlight**

**120/60 Lumens**  
**Floodlight**



**XPP-5454G**

- cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present.
- 82 Meter beam distance
- Dual brightness spotlight & floodlight plus Dual-Light™
- Engineered polymer housing




*Available Early Q2*

XPP-5454G





# Intrinsically Safe

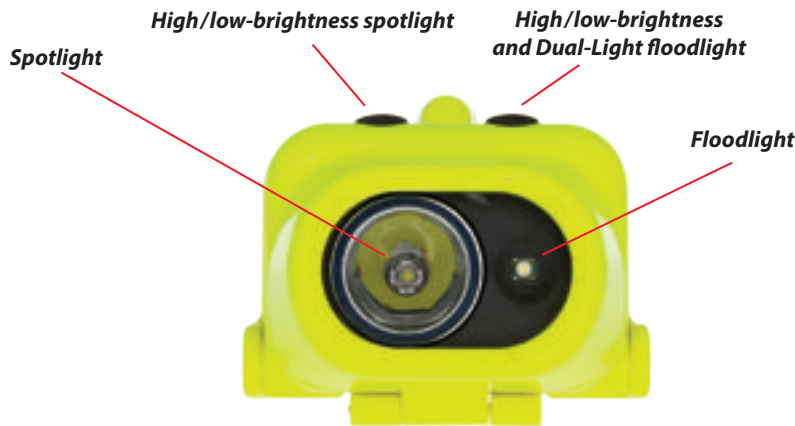

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- High/low-brightness spotlight, high/low-brightness floodlight & Dual-Light™
- Focused spotlight beam for distance illumination
- Wide unfocused floodlight beam for close-up illumination
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AAA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX and IECEx listed Intrinsically Safe for use in both above and below ground hazardous locations where explosive gases and dusts may be present.






Patent 7,738,229

Nightstick 5454 Headlamp	
 Intertek	ID 4008947 INTRINSICALLY SAFE SECURITE INTRINSEQUE
CLASS I DIV 1 GRPS A-D T3 CLASS II & III GRPS E-G T135C CLASS I ZONE 0 AEx ia IIC T3 Ga CLASS I ZONE 0 Ex ia IIC T3 Ga © II 1 G Ex ia IIC T3 Ga CE 0359	Ex ia IIC T3 Ga Intertek ITS 13 ATEX27928X IECEx ETL 13.0045X -20°C ≤ Tamb ≤ +40°C 1.5V/Cell AAA Alkaline
<b>Conforms to:</b> ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26	<b>Certified to:</b> CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5454G	80427 1

## XPP-5450G SPECIFICATIONS

- Lumens: high spotlight-115, low spotlight-60, high floodlight-120, low floodlight-60, dual-light-160
- Run-time: high spotlight-5 hrs, low spotlight-16.25 hrs, high floodlight-5.25 hrs, low floodlight-16.75 hrs, dual-light-3.5 hrs
- Beam distance: 82 meters
- Water rating: IP-X7
- Drop rating: 2 meters
- Width: 2.6in, height: 2.1in, depth: 1.8in, weight: 3.3oz

FL 1 STANDARD	HIGH	LOW
	<b>115 LUMENS</b>	<b>60 LUMENS</b>
	<b>5h</b>	<b>16h 15min</b>
	<b>82m</b>	<b>60m</b>
	<b>1668cd</b>	<b>882cd</b>
	<b>2m</b>	<b>1m</b>

## INCLUDED

- Headlamp
- 3 Premium alkaline AAA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

# Intrinsically Safe

## Multi-Function Headlamps



This non-rechargeable multi-function headlamp is cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present. This headlamp features a multi-position tilt head design, a rear-mounted battery compartment and include both an elastic head strap with a non-slip lining and a heavy-duty rubber strap for use with hard hats. The top mounted dual switches provides spotlight, full-power white floodlight, half-power white floodlight, Dual-Light™ and a red colored floodlight operation. Power comes from 3 AA premium batteries (included).


**INTRINSICALLY SAFE**

**175 Lumens**  
**Dual-Light™**

**100 Lumens**  
**Spotlight**

**90/20 Lumens**  
**White Floodlight**

**18 Lumens**  
**Red Floodlight**



**XPP-5456G**

- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present.
- Beam distance rated at 140 meters
- Spotlight, dual brightness white/red floodlight modes plus Dual-Light™
- Powered by 3 AA Premium batteries (included)



XPP-5456G



# Intrinsically Safe

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – high/low-brightness white floodlight – red floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Red colored floodlight for night vision preservation
- Dual-Light™ (spotlight & any white floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present. *Patent 7,738,229*

Permissible Nightstick XPP-5456G Headlamp

**MSHA** APPROVAL No. 20-A130002-0

TESTED FOR INTRINSIC SAFETY IN METHANE/AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 3) Replace the batteries in fresh air only.  
 4) Replace all batteries at the same time.  
 5) Do not mix batteries from different manufacturers or of different types.  
 6) The Model XPP-5456G Safety Headlamp must not be opened in areas where permissibility is required.  
 7) The Model XPP-5456G Safety Headlamp is approved as a mine light under 30CFR, Part 20. It is not approve as a cap lamp under 30CFR, Part 19.

**Intertek**  
 ID 4003544  
 INTRINSICALLY SAFE  
 SECURITE INTRINSEQUE

CLASS I DIV 1 GRPS A-D T3 Ex ia I Ma  
 CLASS II & III DIV 1 GRPS E-G T135C Ex ia IIC T3 Ga  
 CLASS I ZONE 0 Ex ia IIC T3 Ga Intertek ITS 13 ATEX27838X  
 CLASS I ZONE 0 Ex ia IIC T3 Ga IECEx ETL 13.0025X  
 -20°C ≤ Tamb ≤ +40°C  
 1.5V/Cell AA Alkaline

0359

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25




Heavy-duty rubber head strap

Model	UPC 0 17398
XPP-5456G	80156 0



## XPP-5456G SPECIFICATIONS

- Lumens: spotlight-100, high white floodlight-90, low white floodlight-20, red floodlight-18, dual-light-175
- Run-time: spotlight-18 hrs, high white floodlight-13.5 hrs, low white floodlight-75 hrs, red floodlight-37 hrs, dual-light-6.5 hrs
- Beam distance: 140 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz



## INCLUDED

- Headlamp
- 3 Premium alkaline AA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

# Intrinsically Safe

## Multi-Function Headlamps



This non-rechargeable multi-function headlamp is cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present. This headlamp features a multi-position tilt head design, a rear-mounted battery compartment and include both an elastic head strap with a non-slip lining and a heavy-duty rubber strap for use with hard hats. The top mounted dual switches provides spotlight, full-power white floodlight, half-power white floodlight, Dual-Light™ and a green colored floodlight operation. Power comes from 3 AA premium batteries (included).


**INTRINSICALLY SAFE**

**190 Lumens**  
**Dual-Light™**

**130 Lumens**  
**Spotlight**

**100/25 Lumens**  
**Floodlight**

**21 Lumens**  
**Green Floodlight**



**XPP-5458G**

- cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present.
- Beam distance rated at 120 meters
- Spotlight, dual brightness white/green floodlight modes plus Dual-Light™
- Powered by 3 AA Premium batteries (included)



XPP-5458G



# Intrinsically Safe

## FEATURES

- CREE® LED technology – 50,000 + hours LED life
- Spotlight – high/low-brightness white floodlight – green floodlight
- Focused spotlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Green colored floodlight for night vision preservation
- Dual-Light™ (spotlight & any white floodlight mode at same time) for maximum versatility
- Engineered polymer housing
- Dual switches located on top of light
- Adjustable ratchet tilt head
- Non-slip elastic head strap
- Heavy-duty rubber strap for hard hat applications
- Waterproof
- Impact & chemical resistant
- Powered by 3 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

## SAFETY RATING

cETLus, ATEX, IECEx and MSHA listed Intrinsically Safe Permissible for use in both above and below ground hazardous locations where explosive gases and dusts may be present. *Patent 7,738,229*

Permissible Nightstick XPP-5458G Headlamp  
 APPROVAL No. 20-A130002-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 3) Replace the batteries in fresh air only.  
 4) Replace all batteries at the same time.  
 5) Do not mix batteries from different manufacturers or of different types.  
 6) The Model XPP-5458G Safety Headlamp must not be opened in areas where permissibility is required.  
 7) The Model XPP-5458G Safety Headlamp is approved as a mine light under 30CFR, Part 20. It is not approve as a cap lamp under 30CFR, Part 19.

 ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE 0359	CLASS I DIV 1 GRPS A-D T3	Ex ia I Ma
	CLASS II & III DIV 1 GRPS E-G T135C	Ex ia IIC T3 Ga
	CLASS I ZONE 0 Ex ia IIC T3 Ga	Intertek ITS 13 ATEX27838X
	CLASS I ZONE 0 Ex ia IIC T3 Ga	IECEX ETL 13.0025X
	Ⓜ I M 1 Ex ia I Ma	-20°C ≤ Tamb ≤ +40°C
	Ⓜ II 1 G Ex ia IIC T3 Ga	1.5V/Cell AA Alkaline

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25



Heavy-duty rubber head strap

Model	UPC 0 17398
XPP-5458G	80158 4



## XPP-5458G SPECIFICATIONS

- Lumens: spotlight-130, high white floodlight-100, low white floodlight-25, green floodlight-21, dual-light-190
- Run-time: spotlight-14 hrs, high white floodlight-12.5 hrs, low white floodlight-70 hrs, green floodlight-37 hrs, dual-light-6 hrs
- Beam distance: 120 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Width: 3.3in, height: 3.3in, depth: 3.5in, weight: 9.5oz

FL 1 STANDARD		
130 LUMENS	14h	120m
3500cd	2m	1m

## INCLUDED

- Headlamp
- 3 Premium alkaline AA batteries
- Elastic non-slip head strap
- Heavy-duty rubber hard hat strap

**Safety Lights**

**Safety Light/Flashlight**



Each Safety Light combines a full-size flashlight and a floodlight/flashing safety light in a compact, light-weight package. Two body mounted switches control the lighting functions. The top button powers the tight-beam, long-throw 150 lumens flashlight in either momentary or constant-on mode. The bottom button controls the safety light array with options for constant-on or flashing/alternating (depending on model) operation. Power comes from 4 AA batteries (included).

**150** Flashlight Lumens

**120** Safety Light Lumens

- Constant-on or flashing safety light
- Long-throw flashlight beam
- Long run-times
- Powered by 4 AA batteries (included)



Safety Lights




NSP-1162




NSP-1164



NSP-1166




NSP-1168



NSP-1170



NSP-1172



NSP-1174



NSP-1176



NSP-1178



NSP-1180



## Safety Lights

### FEATURES: ALL MODELS

- Flashlight with CREE® LED technology – 50,000 + hours LED life
- Floodlight/safety light with premium LED technology – 35,000 + hours LED life
- Momentary or constant-on white flashlight (all models)
- High/low-brightness single color floodlight or flashing safety light (1162, 1164, 1166 & 1168)
- Dual-color floodlight or alternating safety light (1170, 1172, 1176, 1178 & 1180)
- White floodlight or flashing amber safety light (1174)
- Sharp focused beam flashlight
- Wide-beam unfocused floodlight/safety light
- Engineered polymer housing
- Non-slip grip
- Comfortable oval shape
- Soft touch finish
- Dual body switches
- Water resistant
- Impact & chemical resistant
- Powered by 4 premium AA alkaline batteries (included)
- Limited Lifetime Warranty\*

### SPECIFICATIONS

- Lumens: flashlight-150, floodlight/safety light-120
- Run-time: flashlight-10 hrs, floodlight/safety light-model dependent (see chart)
- Water rating: IP-X4 water resistant
- Drop rating: 2 meters
- Length: 10.9in, width: 1.3 x .9in, weight: 8.2oz

### INCLUDED

- Safety light/flashlight
- 4 Premium AA alkaline batteries
- Magnetic clip
- Lanyard ring



High-efficiency deep parabolic reflector



Momentary or constant-on flashlight



Constant-on or flashing safety light (NSP-1170 Shown)

### MODELS/ACCESSORIES

MODELS					
Model	Safety Light Color	Safety Light Functions	Constant Safety Light Run-Time Hours	Flashing Safety Light Run-Time Hours	UPC 0 17398
NSP-1162	Red	Constant - half power - flashing	4 full power 8 half power	16	80102 7
NSP-1164	Blue	Constant - half power - flashing	4 full power 8 half power	16	80103 4
NSP-1166	White	Constant - half power - flashing	4 full power 8 half power	16	80104 1
NSP-1168	Amber	Constant - half power - flashing	4 full power 8 half power	16	80105 8
NSP-1170	Blue & Red	Constant or alternating flash	4 full power	16 alternating flasher	80106 5
NSP-1172	White & Red	Constant or alternating flash	4 full power	16 alternating flasher	80107 2
NSP-1174	White & Amber	Constant white - flashing amber	30 led floodlight = 8	24	80119 5
NSP-1174-K01	White & Amber	Constant white - flashing amber	30 led floodlight = 8	24	80125 6
NSP-1176	White & Amber	Constant or alternating flash	4 full power	16 alternating flasher	80114 0
NSP-1178	White & Blue	Constant or alternating flash	4 full power	16 alternating flasher	80138 6
NSP-1180	Amber & Green	Constant or alternating flash	4 constant amber / green	16 alternating flasher	80207 9



Safety cones



Large magnetic base



Magnetic stand



Magnetic clip



NSP-1174-K01



Impact bumpers

Model	Description	UPC 0 17398
1260-RCONE	Red cone	80085 3
1260-YCONE	Yellow cone	80086 0
1160-MSTAND	Magnet stand	80101 0
1160-BASE	Large magnetic base	80026 6
1160-MAGNET	Magnetic clip	80084 6
1260-BUMPERS	Impact bumpers	80135 5

# Feature Overview

## MINI-TAC

## UV

## TACTICAL

	MT-100	MT-110	MT-120	MT-130	MT-200	MT-210	MT-220	MT-230	MTU-106	MTU-136	FDL-300R	TAC-300	TAC310XL	TAC-350
ANSI FL1	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Flash/Flood/Dual-Light™														
Multi-Function					●	●	●	●						
Strobe Mode					●	●	●							
Rechargeable Battery Pack														
Alkaline Batteries	●	●	●	●	●	●	●	●	●	●				
Lithium CR-123											●	●	●	●
Metal Housing	●	●	●	●	●	●	●	●	●	●				●
Polymer Housing											●	●	●	
Soft-Touch Finishing														
Waterproof					●	●	●	●			●	●	●	●
Water Resistant	●	●	●	●					●	●				
Chemical Resistant	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Single Button														
Two Button														
Tail-Cap Switch	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Limited Lifetime Warranty	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Limited 1 Year Warranty														



# Feature Overview

## TACTICAL

## DUTY/PERSONAL-SIZE

TAC-360XL	TAC-400	TAC-410XL	TAC-450	TAC-460XL	TAC-500	TAC-510XL	TAC-540XL	TAC-550	TAC-560XL	NSR-9512	NSR-9514	NSR-9612	NSR-9614	NSR-9920XL	NSR-9924XL	NSR-9940XL	NSR-9944XL
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
														•	•	•	•
					•	•	•	•	•	•	•	•	•	•	•	•	•
					•	•	•	•	•	•	•	•	•	•	•	•	•
	Li	Li	Li	Li	Li	Li	Li†	Li	Li	Li	Li	Li	Li	Li	Li	Li	Li
•							•										
•			•	•			•	•	•			•	•			•	•
	•	•			•	•				•	•			•	•		
																	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
										•	•	•	•				
														•	•	•	•
•	•	•	•	•	•	•	•	•	•		•		•		•		•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

# Feature Overview

## FULL-SIZE

## MULTI-PURPOSE

## HEADLAMPS

	NSR-9744XL	NSR-9746	NSP-1206	NSP-1224	NSP-1260	NSP-1400	NSP-1402	NSP-1404	NSP-2422	SLR & NSR-2166	SLR-2120	NSP-4602	NSP-4604	NSP-4608
ANSI FL1	●	●	●	●		●	●	●	●			●	●	●
Flash/Flood/Dual-Light™	●		●	●	●	●	●	●	●	Spot Flood		●	●	●
Multi-Function	●	●			●									●
Strobe Mode	●	●												
Rechargeable Battery Pack	Li	Li								NiMH	Li			
Alkaline Batteries			●	●	●	●	●	●	●			●	●	●
Lithium CR-123														
Metal Housing	●	●												
Polymer Housing			●	●	●	●	●	●	●	●	●	●	●	●
Soft-Touch Finishing			●	●	●	●	●	●				●	●	●
Waterproof	●	●							●			●	●	●
Water Resistant			●	●	●	●	●	●		●	●			
Chemical Resistant	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Single Button		●	●	●						●		●	●	
Two Button	●				●	●	●	●	●		●			●
Tail-Cap Switch														
Limited Lifetime Warranty	●	●				●	●	●	●			●	●	●
Limited 1 Year Warranty			●	●	●					●	●			

# Feature Overview

## INTRINSICALLY SAFE

SAFETY LIGHTS

NSP-4610	NSP-4612	XPP-5410	XPP-5412	XPP-5420	XPP-5422	XPP-5450	XPP-5452	XPP-5454	XPP-5456	XPP-5458	NSP-1162-1180
•	•	•	•	•	•	•	•	•	•	•	•
Spot Flood	•				•			•	•	•	•
•	•							•	•	•	
											•
•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•
•	•										•
•	•	•	•	•	•	•	•	•	•	•	•
				•		•	•				
•	•				•			•	•	•	•
		•	•								
•	•	•	•	•	•	•	•	•	•	•	•

### Nightstick Warranty







#### \*Limited Lifetime Warranty





Product is warranted to be free from defects in workmanship and materials for the original purchaser's lifetime. The Limited Lifetime Warranty includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two (2) years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.



#### \*\*Limited 1 Year Warranty












Product is warranted to be free from defects in workmanship and materials to the original purchaser for one (1) year from the date of purchase, and includes the LEDs, housing, lenses, electronics, switches, rechargeable batteries and chargers. Disposable non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

## Product Specs






Mini-TAC	Part Number	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	MT-100		100	1.5	44 m	484	Water Resistant	Aircraft-grade Aluminum	2 AAA Batteries	5.4 in (137 mm)		0.6 in (15 mm)	0.8 oz (23 g)	Limited Lifetime	CE
	MT-100BL		100	1.5	44 m	484	Water Resistant	Aircraft-grade Aluminum	2 AAA Batteries	5.4 in (137 mm)		0.6 in (15 mm)	0.8 oz (23 g)	Limited Lifetime	CE
	MT-100R		100	1.5	44 m	484	Water Resistant	Aircraft-grade Aluminum	2 AAA Batteries	5.4 in (137 mm)		0.6 in (15 mm)	0.8 oz (23 g)	Limited Lifetime	CE
	MT-110		90	1	48 m	584	Water Resistant	Aircraft-grade Aluminum	1 AA Battery	3.9 in (99 mm)		0.9 in (23 mm)	1.5 oz (43 g)	Limited Lifetime	CE
	MT-120		140	1.5	68 m	1,173	Water Resistant	Aircraft-grade Aluminum	2 AA Batteries	5.6 in (142 mm)		0.9 in (23 mm)	2.3 oz (65 g)	Limited Lifetime	CE
	MT-130		140	1.5	68 m	1,173	Water Resistant	Aircraft-grade Aluminum	2 AA Batteries	5.6 in (142 mm) - Overall 15.6 in (396 mm)		0.9 in (23 mm)	5.2 oz (147 g)	Limited Lifetime	CE




Mini-TAC Pro	Part Number	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	MT-200	Yes	100 / 60 / 30	1.5 / 3 / 4.5	51 / 36 / 29 m	667 / 334 / 204	Waterproof	Aircraft-grade Aluminum	2 AAA Batteries	5.5 in (140 mm)	0.7 in (18 mm)	0.6 in (15 mm)	1.9 oz (54 g)	Limited Lifetime	CE
	MT-210	Yes	120 / 55 / 30	1.5 / 4 / 6	70 / 51 / 40 m	1,227 / 656 / 398	Waterproof	Aircraft-grade Aluminum	1 AA Battery	4 in (102 mm)	0.9 in (23 mm)	0.6 in (15 mm)	2.2 oz (62 g)	Limited Lifetime	CE
	MT-220	Yes	200 / 90 / 45	1.5 / 4 / 6	100 / 73 / 56 m	2,486 / 1,335 / 797	Waterproof	Aircraft-grade Aluminum	2 AA Batteries	6 in (152 mm)	0.9 in (23 mm)	0.6 in (15 mm)	3.2 oz (91 g)	Limited Lifetime	CE
	MT-230	Yes	3.6 / 10 / 60	36 / 14 / 2	4 / 46 / 65 m	4 / 538 / 1,076	Waterproof	Aircraft-grade Aluminum	1 AA Battery	4 in (102 mm)	0.9 in (23 mm)	0.6 in (15 mm)	2.2 oz (62 g)	Limited Lifetime	CE




Mini-TAC UV	Part Number	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	MTU-106		365 Nanometers	.75			Water Resistant	Aircraft-grade Aluminum	2 AAA Batteries	5.4 in (137 mm)		0.6 in (15 mm)	0.8 oz (23 g)	Limited Lifetime	CE
	MTU-136		365 Nanometers	1.25			Water Resistant	Aircraft-grade Aluminum	2 AA Batteries	5.6 in (142 mm) - Overall 15.6 in (396 mm)		0.9 in (23 mm)	5.2 oz (147 g)	Limited Lifetime	CE






Tactical	Part Number	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	FDL-300R			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium Batteries	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
	TAC-300B			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium Batteries	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
	TAC-300T			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium Batteries	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
	TAC-300Y			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium Batteries	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
	TAC-302B			150	3.5	180 m	8,072	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium Batteries	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
	TAC-310XL	Yes		500	1.5	150 m	5,597	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium Batteries	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE
	TAC-350B			180	3	190 m	9,150	Waterproof	Aircraft-grade Aluminum	2 CR-123 Lithium Batteries	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.7 oz (162 g)	Limited Lifetime	CE
	TAC-360XL	Yes		500	1.5	150 m	5,597	Waterproof	Aircraft-grade Aluminum	2 CR-123 Lithium Batteries	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.7oz (162g)	Limited Lifetime	CE
	TAC-400B			200	3	210 m	12,000	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.9 oz (140g)	Limited Lifetime	CE
	TAC-400T			200	3	210 m	12,000	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.9 oz (140g)	Limited Lifetime	CE
	TAC-400Y			200	3	210 m	12,000	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.9 oz (140 g)	Limited Lifetime	CE

# Product Specs





Tactical	Part Number	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	TAC-410XL	Yes		800	2	205 m	10,765	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.9 oz (140 g)	Limited Lifetime	CE
	TAC-450B			200	3	210 m	12,000	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	6.3 oz (179 g)	Limited Lifetime	CE
	TAC-460XL	Yes		800	2	230 m	12,981	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	6.3 oz (179 g)	Limited Lifetime	CE
	TAC-500B		Yes	200 / 125 / 65	3 / 6 / 12	210 / 150 / 95 m	12,000 / 4,951 / 2,250	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.1 oz (145 g)	Limited Lifetime	CE
	TAC-500T		Yes	200 / 125 / 65	3 / 6 / 12	210 / 150 / 95 m	12,000 / 4,951 / 2,250	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.1 oz (145 g)	Limited Lifetime	CE
	TAC-500Y		Yes	200 / 125 / 65	3 / 6 / 12	210 / 150 / 95 m	12,000 / 4,951 / 2,250	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.1 oz (145 g)	Limited Lifetime	CE
	TAC-510XL	Yes		800	2	205 m	10,765	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	5.1 oz (145 g)	Limited Lifetime	CE
	TAC-540XL	Yes	Yes	800 / 350 / 140	1.5 / 2 / 4.5	205 / 157 / 99 m	10,765 / 6,182 / 2,460	Waterproof	Aircraft-grade Aluminum	2 CR-123 Lithium Batteries	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	6.1 oz (173 g)	Limited Lifetime	CE
	TAC-550B		Yes	200 / 125 / 65	3 / 6 / 12	210 / 150 / 95 m	12,000 / 4,951 / 2,250	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	6.1 oz (173 g)	Limited Lifetime	CE
	TAC-560XL	Yes	Yes	800 / 350 / 140	2 / 3.75 / 8.75	205 / 157 / 99 m	10,765 / 6,182 / 2,460	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.25 in (159 mm)	1.25 in (32 mm)	1.035 in (26mm)	6.1 oz (173 g)	Limited Lifetime	CE



Helmet Light Kits and Mounts	Part Number	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	NS-HMC1								Aluminum Alloy		3.1 in (79 mm)			1.7 oz (48 g)	Limited Lifetime	CE
	NS-HSR1							Waterproof	Silicone Rubber		12 in (305 mm)			3.4 oz (96 g)	Limited Lifetime	CE
	FDL-300R-K01			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium Batteries	5.5 in (140 mm)	1.25 in (32 mm)	1.035 in (26mm)	4.4 oz (124 g)	Limited Lifetime	CE


















Long Gun Light Kits	Part Number	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	TAC-300B-K01			180	3	190 m	9,150	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium Batteries	6 in (152 mm) w/RPS	1.25 in (32 mm)	1.035 in (26mm)	6.3 oz (179 g) w/RPS	Limited Lifetime	CE
	TAC-302B-K01			150	3.5	180 m	8,072	Waterproof	Glass-filled Nylon Polymer	2 CR-123 Lithium Batteries	6 in (152 mm) w/RPS	1.25 in (32 mm)	1.035 in (26mm)	6.3 oz (179 g) w/RPS	Limited Lifetime	CE
	TAC-460XL-K01	Yes		800	2	205 m	10,765	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	6.7 in (170 mm)	1.25 in (32 mm)	1.035 in (26mm)	7.6 oz (215 g)	Limited Lifetime	CE

Duty/Personal-Size	Part Number	Dual-Light	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	NSR-9512B			Yes	350 / 200 / 55	4.25 / 8.5 / 32.5	313 / 235 / 118 m	24,100 / 12,075 / 6,200	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	8.9 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	10.1 oz (286 g)	Limited Lifetime	CE
	NSR-9512Y			Yes	350 / 200 / 55	4.25 / 8.5 / 32.5	313 / 235 / 118 m	24,100 / 12,075 / 6,200	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	8.9 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	10.1 oz (286 g)	Limited Lifetime	CE
	NSR-9514B			Yes	350 / 200 / 55	4.25 / 8.5 / 32.5	313 / 235 / 118 m	24,100 / 12,075 / 6,200	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	8.9 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	10.1 oz (286 g)	Limited Lifetime	CE
	NSR-9612B			Yes	350 / 200 / 55	4.25 / 8.5 / 32.5	313 / 235 / 118 m	24,100 / 12,075 / 6,200	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	8.9 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	12.8 oz (363 g)	Limited Lifetime	CE
	NSR-9614B			Yes	350 / 200 / 55	4.25 / 8.5 / 32.5	313 / 235 / 118 m	24,100 / 12,075 / 6,200	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	8.9 in (226 mm)	1.6 in (41 mm)	1.2 in (30 mm)	12.8 oz (363 g)	Limited Lifetime	CE

## Product Specs

Duty/Personal-Size	Part Number	Dual-Light	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	NSR-9920XL	Yes	Yes	Yes	650 / 300 / 100 / 600 / 600	3 / 6 / 17 / 3 / 3	275 / 200 / 75 m	18,675 / 9,687 / 1,356	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	10.9 oz (309 g)	Limited Lifetime	CE
	NSR-9924XL	Yes	Yes	Yes	650 / 300 / 100 / 600 / 600	3 / 6 / 17 / 3 / 3	275 / 200 / 75 m	18,675 / 9,687 / 1,356	Waterproof	Glass-filled Nylon Polymer	Rechargeable Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	9.9 oz (281 g)	Limited Lifetime	CE
	NSR-9940XL	Yes	Yes	Yes	650 / 300 / 100 / 600 / 600	3 / 6 / 17 / 3 / 3	275 / 200 / 75 m	18,675 / 9,687 / 1,356	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	13.2 oz (374 g)	Limited Lifetime	CE
	NSR-9944XL	Yes	Yes	Yes	650 / 300 / 100 / 600 / 600	3 / 6 / 17 / 3 / 3	275 / 200 / 75 m	18,675 / 9,687 / 1,356	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	9.5 in (241 mm)	1.6 in (41 mm)	1.2 in (30 mm)	13.2 oz (374 g)	Limited Lifetime	CE

Full-Size	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	NSR-9744XL	Yes	Yes	650 / 300 / 100 / 600 / 600	4.5 / 9 / 25.5 / 4.5 / 4.5	275 / 200 / 75 m	18,675 / 9,687 / 1,356	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	11.8 in (300 mm)	1.6 in (41 mm)	1.2 in (30 mm)	17.5 oz (496 g)	Limited Lifetime	CE & RoHS
	NSR-9746B		Yes	420 / 225 / 45	4.25 / 10 / 63	500 / 330 / 150 m	70,000 / 27,663 / 5,726	Waterproof	Aircraft-grade Aluminum	Rechargeable Lithium-ion	12.8 in (325 mm)	2.4 in (61 mm)	1.2 in (30 mm)	22.5 oz (638 g)	Limited Lifetime	CE & RoHS

Multi-Purpose	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	NSP-1206B	Yes	Yes	9 / 16 / 17	5 / 7 / 4	15 m	53	Water Resistant	Engineered Polymer	2 AAA Batteries	4.4 in (112 mm)		1.1 x 0.8 in (28 x 20 mm)	1.8 oz (51 g)	1 Year Limited	CE
	NSP-1206R	Yes	Yes	9 / 16 / 17	5 / 7 / 4	15 m	53	Water Resistant	Engineered Polymer	2 AAA Batteries	4.4 in (112 mm)		1.1 x 0.8 in (28 x 20 mm)	1.8 oz (51 g)	1 Year Limited	CE
	NSP-1224B	Yes	Yes	65 / 100 / 125	5 / 2.5 / 2.25	45 m	505	Water Resistant	Engineered Polymer	4 AAA Batteries	7.9 in (201 mm)		1.1 x 0.8 in (28 x 20 mm)	5.2 oz (147 g)	1 Year Limited	CE
	NSP-1224R	Yes	Yes	65 / 100 / 125	5 / 2.5 / 2.25	45 m	505	Water Resistant	Engineered Polymer	4 AAA Batteries	7.9 in (201 mm)		1.1 x 0.8 in (28 x 20 mm)	5.2 oz (147 g)	1 Year Limited	CE
	NSP-1260	Yes	Yes	150 / 120 / 60 / 270	10 / 4 / 10 / 3			Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)		1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	1 Year Limited	CE
	NSP-1400B	Yes	Yes	60 / 25 / 90	3 / 3 / 1.5	50 m	650	Water Resistant	Engineered Polymer	2 AAA Batteries	5.3 in (135 mm)		1.1 x 0.8 in (28 x 20 mm)	2.2 oz (62 g)	Limited Lifetime	CE
	NSP-1400R	Yes	Yes	60 / 25 / 90	3 / 3 / 1.5	50 m	650	Water Resistant	Engineered Polymer	2 AAA Batteries	5.3 in (135 mm)		1.1 x 0.8 in (28 x 20 mm)	2.2 oz (62 g)	Limited Lifetime	CE
	NSP-1400T	Yes	Yes	60 / 25 / 90	3 / 3 / 1.5	50 m	650	Water Resistant	Engineered Polymer	2 AAA Batteries	5.3 in (135 mm)		1.1 x 0.8 in (28 x 20 mm)	2.2 oz (62 g)	Limited Lifetime	CE
	NSP-1402B	Yes	Yes	60 / 15	3 / 2.8	50 m	650	Water Resistant	Engineered Polymer	2 AAA Batteries	5.3 in (135 mm)		1.1 x 0.8 in (28 x 20 mm)	2.2 oz (62 g)	Limited Lifetime	CE
	NSP-1404B	Yes	Yes	60 / 10	3 / 5.5	50 m	650	Water Resistant	Engineered Polymer	2 AAA Batteries	5.3 in (135 mm)		1.1 x 0.8 in (28 x 20 mm)	2.2 oz (62 g)	Limited Lifetime	CE
	NSP-2422B	Yes	Yes	130 / 110 / 235	9.5 / 10.5 / 6	181 m	8,150	Waterproof	Engineered Polymer	3 AA Batteries	7 in (178 mm)	1.8 in (46 mm)	1.3 x 1 in (33 x 25 mm)	6.4 oz (181 g)	Limited Lifetime	CE
	NSP-2422R	Yes	Yes	130 / 110 / 235	9.5 / 10.5 / 6	181 m	8,150	Waterproof	Engineered Polymer	3 AA Batteries	7 in (178 mm)	1.8 in (46 mm)	1.3 x 1 in (33 x 25 mm)	6.4 oz (181 g)	Limited Lifetime	CE
	NSR-2492	Yes	Yes	200 / 170 / 325	3 / 2.5 / 1.5	170 m	6,953	Water Resistant	Engineered Polymer	Integrated Rechargeable NiMH	11.5 in (292 mm)		1.7 in (43 mm)	10.1 oz (286 g)	1 Year Limited	CE
	NSR-2166B		Yes	32 / 230	18 / 3			Water Resistant	Engineered Polymer	Integrated Rechargeable NiMH	14.3 in (363 mm)	1.4 in (36 mm)	1.8 in (46 mm)	16 oz (454 g)	1 Year Limited	CE
	NSR-2166R		Yes	32 / 230	18 / 3			Water Resistant	Engineered Polymer	Integrated Rechargeable NiMH	14.3 in (363 mm)	1.4 in (36 mm)	1.8 in (46 mm)	16 oz (454 g)	1 Year Limited	CE
	SLR-2166		Yes	32 / 230	18 / 3			Water Resistant	Engineered Polymer	Integrated Rechargeable NiMH	14.3 in (363 mm)	1.4 in (36 mm)	1.8 in (46 mm)	16 oz (454 g)	1 Year Limited	CE
	SLR-2120			1200/650	4.5 / 8.5			Water Resistant	Engineered Polymer	Integrated Rechargeable NiMH	42.4 in (1,077 mm)		2 in (51 mm)	115 oz (3,260 g)	1 Year Limited	CE

# Product Specs

Headlamps	Part Number	Dual-Light	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Width	Height	Depth	Weight	Warranty	Certification
	NSP-4602B	Yes	Yes	9/30/1930	40 / 11 / 16	18 m	84	Waterproof	Engineered Polymer	3 AAA Batteries	2.4 in (61 mm)	1.9 in (48 mm)	1.8 in (46 mm)	3.3 oz (94 g)	Limited Lifetime	CE
	NSP-4604B	Yes	Yes	55 / 40 / 80	6 / 8 / 5	50 m	650	Waterproof	Engineered Polymer	3 AAA Batteries	2.4 in (61 mm)	1.9 in (48 mm)	1.9 in (48 mm)	3.3 oz (94 g)	Limited Lifetime	CE
	NSP-4608B	Yes	Yes	100 / 60 / 90 / 50 / 115	5 / 13.5 / 4.25 / 13.75 / 3.5	77 / 55 m	1,506 / 775	Waterproof	Engineered Polymer	3 AAA Batteries	2.6 in (66 mm)	2.1 in (53 mm)	1.8 in (46 mm)	3.3 oz (94 g)	Limited Lifetime	CE
	NSP-4610B		Yes	150 / 80 / 100 / 9 / 18 / 180	4 / 8 / 4 / 25 / 22.5	60 / 43 m	1,377 / 667	Waterproof	Engineered Polymer	3 AAA Batteries	2.6 in (66 mm)	2.1 in (53 mm)	1.8 in (46 mm)	3.3 oz (94 g)	Limited Lifetime	CE
	NSP-4612B	Yes	Yes	100 / 90 / 20 / 18 / 175	18 / 13.5 / 7.5 / 37	140 m	4,820	Waterproof	Engineered Polymer	3 AA Batteries	3.3 in (84 mm)	3.3 in (84 mm)	3.5 in (89 mm)	9.5 oz (269 g)	Limited Lifetime	CE

Intrinsically Safe	Part Number	Dual-Light	Xtreme Lumens	Multi-Function	Lumens	Run-time (hrs)	Beam Distance	Candela	Water Rating	Case Material	Power Source	Length	Head Diameter	Handle Diameter	Weight	Warranty	Certification
	XPP-5410G				30	18	40 m	107	Waterproof	Engineered Polymer	2 AAA Batteries	5.8 in (147 mm)	0.9 in (23 mm)	0.7 in (18 mm)	1.9 oz (54 g)	Limited Lifetime	cETLus, ATEX, IECEx, MSHA, CE
	XPP-5412G				50	13.75	50 m	161	Waterproof	Engineered Polymer	3 AAAA Batteries	6.8 in (173 mm)	0.6 in (15 mm)	0.5 in (13 mm)	1.5 oz (43 g)	Limited Lifetime	cETLus, ATEX, IECEx, CE
	XPP-5420B				140	10	180 m	7,500	Waterproof	Engineered Polymer	3 AA Batteries (not included)	7.0 in (178 mm)	1.8 in (46 mm)	1.1 x 1.5 in (28 x 38 mm)	7.3 oz (207 g)	Limited Lifetime	cETLus, ATEX, IECEx, MSHA, CE
	XPP-5420G				140	10	180 m	7,500	Waterproof	Engineered Polymer	3 AA Batteries (not included)	7.0 in (178 mm)	1.8 in (46 mm)	1.1 x 1.5 in (28 x 38 mm)	7.3 oz (207 g)	Limited Lifetime	cETLus, ATEX, IECEx, MSHA, CE
	XPP-5422B	Yes		Yes	120 / 120 / 240	17.5 / 17.5 / 4.5	170 m	7,250	Waterproof	Engineered Polymer	3 AA Batteries (not included)	7.0 in (178 mm)	1.8 in (46 mm)	1.1 x 1.5 in (28 x 38 mm)	6.9 oz (196 g)	Limited Lifetime	cETLus, ATEX, IECEx, MSHA, CE
	XPP-5422G	Yes		Yes	120 / 120 / 240	17.5 / 17.5 / 4.5	170 m	7,250	Waterproof	Engineered Polymer	3 AA Batteries (not included)	7.0 in (178 mm)	1.8 in (46 mm)	1.1 x 1.5 in (28 x 38 mm)	6.9 oz (196 g)	Limited Lifetime	cETLus, ATEX, IECEx, MSHA, CE
Available Early Q2	XPP-5422GM	Yes		Yes	120 / 120 / 240	17.5 / 17.5 / 4.5	170 m	7,250	Waterproof	Engineered Polymer	3 AA Batteries (not included)	7.0 in (178 mm)	1.8 in (46 mm)	1.1 x 1.5 in (28 x 38 mm)	6.9 oz (196 g)	Limited Lifetime	cETLus, ATEX, IECEx, CE
	XPP-5450G			Yes	60 / 40	13.5 / 22.75	80 / 65 m	1,615 / 1,076	Waterproof	Engineered Polymer	3 AAA Batteries	2.4 in (61 mm) Width	1.9 in (48 mm) Height	1.8 in (46 mm) Depth	3.5 oz (99 g)	Limited Lifetime	cETLus, ATEX, IECEx, CE
	XPP-5452G			Yes	115 / 65	4.5 / 13	92 / 67 m	2,152 / 1,141	Waterproof	Engineered Polymer	3 AAA Batteries	2.4 in (61 mm) Width	1.9 in (48 mm) Height	1.8 in (46 mm) Depth	3.5 oz (99 g)	Limited Lifetime	cETLus, ATEX, IECEx, CE
Available Early Q2	XPP-5454G			Yes	115 / 60 / 120 / 60 / 160	5 / 16.25 / 5.25 / 16.75 / 3.5	82 / 60 m	1,668 / 882	Waterproof	Engineered Polymer	3 AAA Batteries	2.6 in (66 mm) Width	2.1 in (53 mm) Height	1.8 in (46 mm) Depth	3.5 oz (99 g)	Limited Lifetime	cETLus, ATEX, IECEx, CE
	XPP-5456G	Yes		Yes	100 / 90 / 20 / 18 / 175	18 / 13.5 / 7.5 / 37 / 6.5	140 m	4,820	Waterproof	Engineered Polymer	3 AA Batteries	3.3 in (84 mm) Width	3.3 in (84 mm) Height	1.8 in (89 mm) Depth	3.3 oz (269 g)	Limited Lifetime	cETLus, ATEX, IECEx, CE
	XPP-5458G	Yes		Yes	130 / 100 / 25 / 21 / 190	14 / 12.5 / 7.0 / 37 / 6	120 m	3,500	Waterproof	Engineered Polymer	3 AA Batteries	3.3 in (84 mm) Width	3.3 in (84 mm) Height	3.5 in (89 mm) Depth	9.5 oz (269 g)	Limited Lifetime	cETLus, ATEX, IECEx, MSHA, CE

Safety Lights	Part Number	Multi-Function	Lumens	Run-time (hrs)	Water Rating	Case Material	Power Source	Length	Handle Diameter	Weight	Warranty	Certification
	NSP-1162	Yes	150 / 120	10 / 4 / 8 / 16	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	Limited Lifetime	RoHS
	NSP-1164	Yes	150 / 120	10 / 4 / 8 / 16	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	Limited Lifetime	RoHS
	NSP-1166	Yes	150 / 120	10 / 4 / 8 / 16	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	Limited Lifetime	RoHS
	NSP-1168	Yes	150 / 120	10 / 4 / 8 / 16	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	Limited Lifetime	RoHS
	NSP-1170	Yes	150 / 120	10 / 4 / 8 / 16	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23 mm)	8.2 oz (233 g)	Limited Lifetime	RoHS
	NSP-1172	Yes	150 / 120	10 / 4 / 8 / 16	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	Limited Lifetime	RoHS
	NSP-1174	Yes	150 / 120	10 / 8 / 24	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	Limited Lifetime	RoHS
	NSP-1174-K01	Yes	150 / 120	10 / 8 / 24	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	Limited Lifetime	RoHS
	NSP-1176	Yes	150 / 120	10 / 4 / 8 / 16	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	Limited Lifetime	RoHS
	NSP-1178	Yes	150 / 120	10 / 4 / 8 / 16	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	Limited Lifetime	RoHS
	NSP-1180	Yes	150 / 120	10 / 4 / 8 / 16	Water Resistant	Engineered Polymer	4 AA Batteries	10.9 in (277 mm)	1.3 x 0.9 in (33 x 23mm)	8.2 oz (233 g)	Limited Lifetime	RoHS

## Accessories

	MT-110 MT-120 MT-210 MT-220 MT-230	FDL-300 TAC-300 TAC-310XL TAC-350 TAC-360XL	TAC-400 TAC-410XL TAC-450 TAC-460XL	TAC-500 TAC-510XL TAC-540XL TAC-550 TAC-560XL	9512 9514 9612 9614 9920XL 9924XL 9940XL 9944XL	9744XL 9746	1162 1164 1166 1168 1170 1172 1174 1176 1178 1180	1206 1224	1260	1400 1402 1404	2422	2166	5450 5452 5454 5456 5458	UPC 017398
--	--	---	--	---	--	----------------	--	--------------	------	----------------------	------	------	--------------------------------------	---------------



### CONES

200-RCONE	Red safety cone		X	X	X									80131 7
200-YCONE	Yellow safety cone		X	X	X									80132 4
1200-RCONE	Red safety cone							X		X				70002 3
1200-YCONE	Yellow safety cone							X		X				70001 6
1260-RCONE	Red safety cone						X		X					80085 3
1260-YCONE	Yellow safety cone						X		X					80086 0
9600-RCONE	Red safety cone					X								80226 0
9600-YCONE	Yellow safety cone					X	9744XL							80228 4
9600-BCONE	Blue safety cone					X	9744XL							80223 9
9700-RCONE	Red safety cone						9746							80313 7
9700-YCONE	Yellow safety cone						9746							80314 4
9700-BCONE	Blue safety cone						9746							80315 1

### HOLSTER / BELT RINGS

MT-HOLSTER1	Belt holster	X											5410	80464 6
200-HOLSTER	Belt holster		X	X	X									80233 8
300-HOLSTER	Belt holster		X	X	X									80454 7
1200-HOLSTER	Belt holster							X						70003 0
5420-HOLSTER	Belt holster										X	X		80234 5
9850-BRBW	Basket weave leather belt ring						9746							98501 7
9850-BRBW	Nylon belt ring						9746							98502 4
9850-BRPL	Patent leather belt ring						9746							98503 1
9850-BRSL	Standard leather belt ring						9746							98504 8

 <p>Batteries</p>	 <p>High-Visibility Cones</p>	 <p>Holsters and Belt rings</p>	 <p>Single &amp; Multi-Unit Chargers</p>
--	--	--	---

 <p>AC/DC Power Supplies</p>	<p>Remote Switch Battery Carrier Filters Stands Pocket-Clips</p> 
---	---



# Accessories

		FDL-300 TAC-300 TAC-310XL TAC-350 TAC-360XL	TAC-400 TAC-410XL TAC-450 TAC-460XL	TAC-500 TAC-510XL TAC-540XL TAC-550 TAC-560XL	9512 9514 9612 9614 9920XL 9924XL 9940XL 9944XL	9744XL 9746	1162 1164 1166 1168 1170 1172 1174 1176 1178 1180	1206 1224	1260	1400 1402 1404	2422	2166	5450 5452 5454 5456 5458	UPC 017398
<b>MISCELLANEOUS</b>														
1160-MSTAND	Magnetic stand						X		X					80101 0
1160-BASE	Large magnetic stand						X		X					80026 6
1200-CLIP	Pocket clip							X		X				70005 4
1200-FILTER	Red & green attachable filters							X		X				70006 1
1200-MAGNET	Clip-on magnet							X		X				70004 7
1160-MAGNET	Magnetic clip						X		X					80084 3
400B-SS	tail cap side switch	X	X											80141 6
400B-RPS	Black remote pressure switch - 6 inch cord	X	X											80130 0
CR-123-10	CR-123 lithium battery (10 pk)	X	X	X										80112 6
1260-BUMPERS	Pair of black impact protection bumpers						X		X					80135 5
2166-HOOK	Replacement hook											X		80050 1
<b>BATTERIES</b>														
400-BATT	Lithium-ion rechargeable battery		X	X										80144 7
500-CARRIER	CR-123 battery carrier. Converts TAC-500 series flashlights from rechargeable to disposable CR-123 lithium		X	X										80311 3
9600-BATT	Lithium-ion rechargeable battery				X									80222 2
9700-BATT	Lithium-ion rechargeable battery					X								80312 0
<b>CHARGERS</b>														
400-CHGR1	Charger for TAC-400 & TAC- 500 series flashlights		X	X										80142 3
9600-CHGR1	Charger for 9500, 9600, 9700 & 9900 series (no power cords)				X	X								80224 6
9600-CHGR5	Charge up to five 9500, 9600, 9700 & 9900 series flashlights at once				X	X								80225 3
9600-USB	USB charging cord- 27in (0.68m)				X	X								80227 7
9914-ACCORD	AC charging cord for US, UK, Australia, Canada and Europe		X	X	X	X								81046 3
9914-DCORD	12V DC charging cord (cigarette lighter connector)- temporary charging power from a vehicle		X	X	X	X								81047 0
9914-DW	12V DC direct wiring kit for automobile installation - permanent charging power from a vehicle		X	X	X	X								80044 0

## ANSI FL-1



NSR-9614B

### Compare Flashlight Performance at a Glance

- ❖ Prior to the ANSI/NEMA FL-1 standards there were no standardized tests or uniform rating systems to objectively evaluate flashlight performance.
- ❖ ANSI/NEMA FL-1 standard allows consumers to compare the technical performance of flashlights using an easy to understand icon format.
- ❖ Manufacturers of flashlights voluntarily invest in the effort and technology necessary to measure their flashlights performance.

## Understanding ANSI / NEMA FL-1 Icons

How much light is available?		<b>Light Output</b> Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.
How far will the beam throw?		<b>Beam Distance</b> Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon on a clear night in an open field)
How bright is the light?		<b>Peak Beam Intensity</b> Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.
How long can I operate the light?		<b>Run-Time</b> Run-Time is defined as the duration of time from the initial light output value—defined as 30 seconds after the point the device is first turned on—using fresh batteries, until the light output reaches 10% of the initial value.
What drop distance will the light survive?		<b>Impact Resistance</b> Impact Resistance is the degree to which a device resists damage from dropping on a solid surface. Dropped samples must not exhibit any cracks or breaks, and must remain fully functional to pass this test.
How well is the light protected from water?		<b>Flashlight Ability to Resist Water Penetration</b> Water Penetration standards are defined by ANSI/IEC. A rating is assigned to a flashlight that corresponds to its ability to resist water penetration.
		<u>Water Resistant—IPX4</u> —Water splashed against the device from any direction  <u>Water Proof—IPX7</u> —Temporarily immersing the flashlight underwater. Generally 1 meter for 30 minutes

\*American National Standards Institute and National Electrical Manufacturers Association



# Understanding Dual-Light


TECHNOLOGY

**Flashlights:** Designed for distance illumination. The center spot makes them too bright for objects that are close.

**Floodlights:** Designed to light up things that are close. Wide, even lighting with no bright center spot.

**Dual-Light:** Combines a flashlight and a floodlight into the same light. Two lighting tools in one. Completely transforming the way hand-held lights are used.

## ANSI FL-1 Flashlight Lumens & Beam Distance

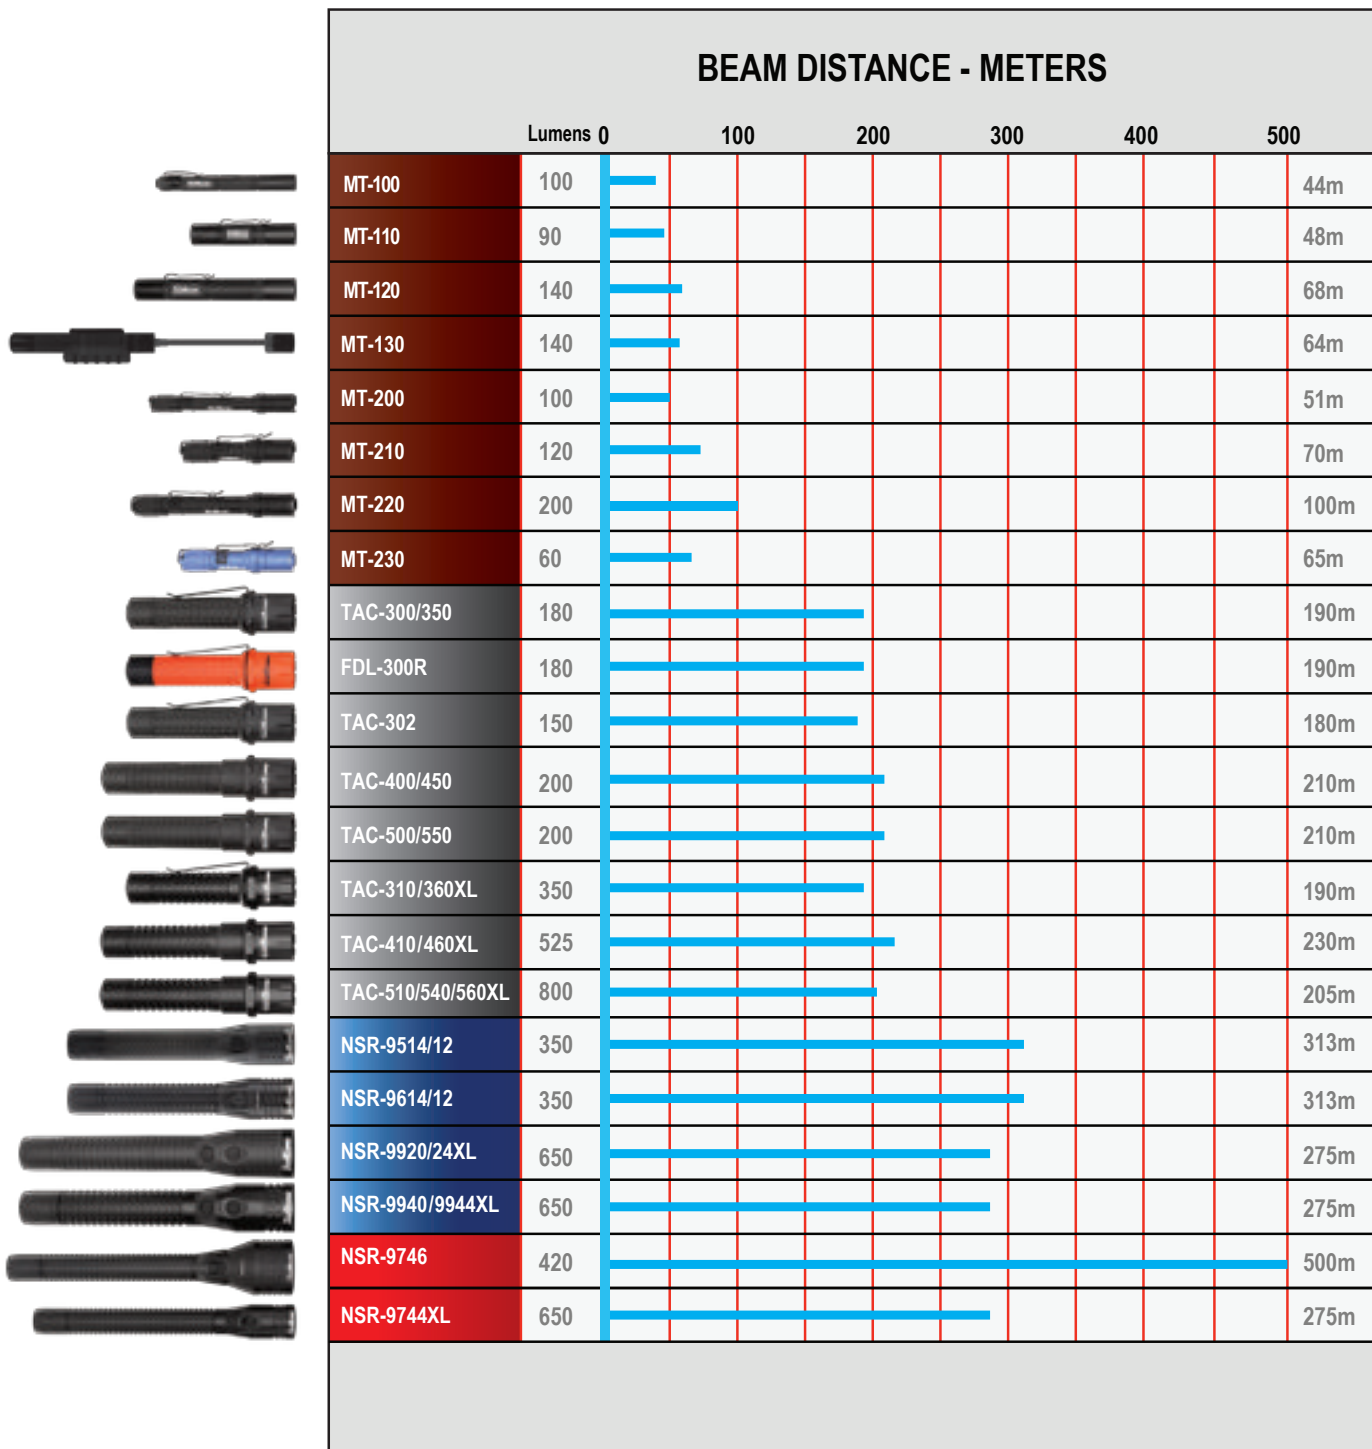



BEAM DISTANCE - METERS							
	Lumens	0	100	200	300	400	500
NSP-1400	60						50m
NSP-2422	130						181m
NSP-2492	200						170m
NSP-4602	9						18m
NSP-4604	55						50m
NSP-4608	100						77m
NSP-4610	150						60m
NSP-4612	100						140m
XPP-5410	30						40m
XPP-5412	50						50m
XPP-5420	140						180m
XPP-5422	120						170m
XPP-5450	60						80m
XPP-5452	115						92m
XPP-5454	115						82m
XPP-5456	100						140m
XPP-5458	130						120m

## Safety in Hazardous Environments

### FIRE AND EXPLOSION RISK














Industrial and production operations are prime environments for the potential build-up of combustible gases, liquids, dust and other ignitable sources. Fire and explosion hazards can occur in that environment. Working in a hazardous environment requires fixed and portable task lighting that are intrinsically safe to keep personnel and property safe from explosion and fire.

### WHAT DOES IT MEAN WHEN A DEVICE IS INTRINSICALLY SAFE?

A device that is intrinsically safe means that it is safe to use in hazardous work environments and by itself will not cause a fire or explosion. Maintaining intrinsic safety requires that the light be used properly and not tampered with so the intrinsically safe capability remains in tact.



An explosive atmosphere is defined as a mixture of dangerous substances with air, under atmospheric conditions, in the form of gases, vapors, mist or dust in which, after ignition has occurred, combustion spreads to the entire unburned mixture.

	Model					
	XPP-5410	✓	✓	✓	✓	✓
	XPP-5412	✓	✓	✓	✓	
	XPP-5420G XPP-5420B	✓	✓	✓	✓	✓
	XPP-5422G XPP-5422B	✓	✓	✓	✓	✓
	XPP-5422GM	✓	✓	✓	✓	
	XPP-5450 XPP-5452	✓	✓	✓	✓	
	XPP-5454	✓	✓	✓	✓	
	XPP-5456 XPP-5458	✓	✓	✓	✓	✓

† As of the printing of this catalog



## TESTING LABORATORIES



### ETL

The ETL Listed Mark is proof of product compliance (electrical, gas and other safety standards) to North American safety standards, including UL, ANSI, CSA, ASTM and NFPA standards



### ATEX Directive

The European based ATEX directive defines the equipment and work environment that is allowed to function in an explosive atmosphere. The regulations apply to all equipment intended for use in explosive atmospheres, either electrical or mechanical, including protective systems. The directive covers a large range of equipment where a potentially explosive atmosphere may be present.



### CE

CE mark is the official marking required by the European Community for products that will be sold, or put into service in the European community. The product fulfills all essential safety and environmental requirements for the product's intended use, as they are defined in the European Directives, primarily ISO Standards.



### IECEX

The IECEX is the International Electrotechnical Commission system for the certification to standards for electrical equipment for explosive atmospheres.



### MSHA

Mine Safety and Health Administration requires that portable battery operated lighting be designed and tested to not pose an explosion hazard in mining operations.


## Why Make a Flashlight Using Bulbs?



### Some manufacturers are still making flashlights with incandescent bulbs.

Even the best xenon and krypton bulbs break when the light is dropped and can also produce a yellow color light that distorts the appearance of the object being illuminated.

**At Nightstick we believe in using the best available technology.**

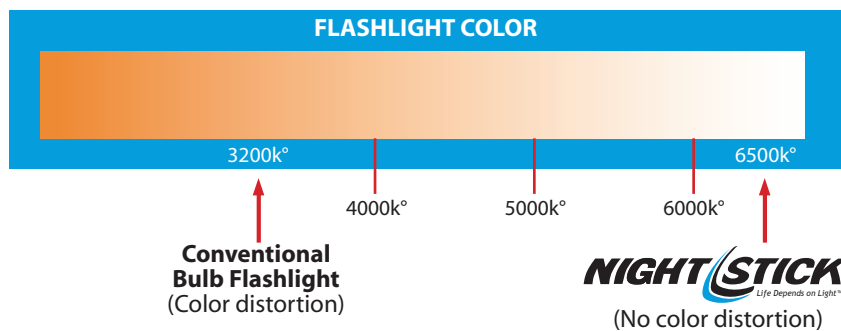

NSR-9614B

### World's Best LEDs

All Nightstick flashlights use LED technology from CREE® the makers of the brightest and most rugged LEDs in the world.

CREE® brilliant white-light LED's have an operating life in excess of 50,000 hours. That means if you use a Nightstick flashlight 8 full hours every workday of the year, the CREE® LED would last over 24 years. A Nightstick flashlight could literally be the last flashlight you will ever need.

We select the whitest LEDs so objects are illuminated with no color distortion. Reflectors are designed to efficiently capture and concentrate light from the LEDs for maximum beam distance.



# Battery Characteristics



Standard use rechargeable NiMH



Intrinsically safe use rechargeable NiMH



Standard use rechargeable Lithium-ion



Standard use Lithium air CR-123



Standard use alkaline AA – AAA – AAAA



Standard use NiCad

<p><b>Nickel Metal Hydride NiMH</b></p>	<ul style="list-style-type: none"> <li>▪ Ideal for modern LED rechargeable flashlights</li> <li>▪ Virtually no memory effect. Near full capacity every charge cycle</li> <li>▪ 2 times the energy capacity of comparable NiCad battery</li> <li>▪ Typical cycle life is 3000 cycles</li> </ul>
<p><b>Rechargeable Lithium</b></p>	<ul style="list-style-type: none"> <li>▪ Ideal for high output LED flashlights</li> <li>▪ Higher energy density than NiCad, NiMH and alkaline batteries</li> <li>▪ No memory effect</li> <li>▪ High cell voltage</li> <li>▪ Flat discharge characteristic</li> <li>▪ Very long shelf life - Very long operating life, 15 to 20 years</li> <li>▪ Typical cycle life is 3000 cycles</li> </ul>
<p><b>Lithium Air Cells CR-123</b></p>	<ul style="list-style-type: none"> <li>▪ Ideal for high output LED flashlights</li> <li>▪ Very high energy density for its size</li> <li>▪ Flat discharge characteristic</li> <li>▪ Very long shelf life</li> </ul>
<p><b>Alkaline Batteries AA, AAA, AAAA</b></p>	<ul style="list-style-type: none"> <li>▪ The most popular premium general purpose battery</li> <li>▪ Four times the capacity of an equivalent size rechargeable NiCad or NiMH battery</li> <li>▪ Suitable for high drain rate applications</li> <li>▪ Good shelf life</li> <li>▪ Not normally rechargeable</li> </ul>
<p><b>Nickel Cadmium NiCad</b></p>	<ul style="list-style-type: none"> <li>▪ Ideal for old style flashlights with xenon bulbs</li> <li>▪ Flat discharge characteristic but falls off rapidly at the end of the cycle</li> <li>▪ Major drawback is recharge memory effect. During charging a chemical process is degrading the battery's ability to store energy. Each charge degrades the battery more. Eventually the battery can no longer be charged</li> <li>▪ Use of heavy metals makes it environmentally toxic</li> <li>▪ Typical cycle life is over 500 cycles</li> </ul>

# Innovation • Quality • Safety

For over 30 years, Bayco Products' vast array of portable & corded lighting products, have been the preferred choice of professionals and discriminating consumers. The Nightstick and Bayco brands are recognized world-wide as high-performance, high-quality, high-value lighting solutions across virtually every industry.

Headquartered in North Texas, Bayco Products' 110,000 square foot facility is the international headquarters for R&D, engineering, marketing, sales and distribution. Bayco Products has dedicated ISO 9001 Certified factories both in the US and abroad.



Nightstick is the exclusive brand of professional lighting tools made by Bayco Products, Inc.

# Engineering • Testing • Manufacturing

*Nightstick flashlights are designed in the USA and manufactured at Bayco's dedicated ISO 9001 Certified Factories.*



*Rigorous quality testing and analysis is utilized to insure product quality and consistency*



*Our luminosity and testing facility measures product performance to confirm complex design parameters*



# **NIGHTSTICK**<sup>®</sup>

Life Depends on Light<sup>™</sup>

**BAYCO**<sup>®</sup>  
PRODUCTS INC.

**640 S. Sanden Blvd.**

**Wylie, TX 75098**

**800-233-2155**

**[www.mynightstick.com](http://www.mynightstick.com)**

Nightstick products are designed in Texas, US and manufactured abroad with components from domestic and international sources.

The distinctive shapes, styles, packaging, configurations and overall appearances of these products are trademarks of Bayco Product, Inc. The unique LED configuration, body and case shapes inherently identify them as members of the Bayco Product, Inc. portfolio.



**CAT-NS-15C**