

## NSR-9940XLLB

### Xtreme Lumens Metal Multi-Function Duty/Personal-Size Dual-Light w/Magnet Rechargeable (light & battery only)

<b>MARKET APPLICATIONS</b>	Industrial, automotive, law enforcement, fire & rescue, security, hardware/tool
<b>DESCRIPTION</b>	This duty/personal-size rechargeable metal multi-function Xtreme Lumens dual-light uses a CREE® LED rated at 650 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable beam rated at 275 meters. A 600 lumens unfocused floodlight is integrated in to the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum safety and versatility. The flashlight body switch provides momentary or constant-on functionality, a set of user-selectable high, medium or low-brightness settings as well as a disorienting strobe. The second body switch operates the floodlight. The powerful magnet built into the tail-cap provides for hands-free use. The housing and tail-cap are made from aircraft-grade 6061-T6 aluminum and bezel is constructed from 316 stainless steel bezel. The housing, tail-cap and the bezel have a Type III hard anodized finish. Power comes from a rechargeable Lithium-ion battery.
<b>CASE MATERIAL</b>	Aircraft-grade 6061-T6 Aluminum with 316 Stainless Steel bezel all with Type III Hard Anodized Finish - Black
<b>DIMENSIONS</b>	Length: 9.5 inches (241 mm) • Handle diameter: 1.2 inches (30 mm) • Head diameter: 1.6 inches (41 mm)
<b>WEIGHT</b>	Weight: 13.2 oz. (374 g) with battery installed.
<b>LENS</b>	Unbreakable polycarbonate with scratch resistant coating.
<b>LIGHT SOURCE</b>	Cree® LED. Impervious to shock with a 50,000 hour lifetime.
<b>LIGHT OUTPUT</b>	Flashlight: High - 650 lumens, Medium - 300 lumens, Low - 100 lumens, Strobe - 300 lumens • Floodlight: 600 lumens • Dual-Light: 600 lumens
<b>ON/OFF</b>	First Body Switch - Momentary or Constant-on Flashlight, High, Medium and Low-Brightness Flashlight, Strobe • Second Body Switch - Floodlight • First & Second Body Switch - Dual-Light
<b>RUN-TIME</b>	Flashlight: High - 3 hours, Medium - 6 hours, Low - 17 hours, Strobe - 6 hours • Floodlight: 3 hours • Dual-Light: 3 hours
<b>BATTERY</b>	2-cell, 6 Volt Lithium-ion battery pack
<b>CHARGING</b>	Optional charger is wall or vehicle mountable. Charges in 4 hours (typical) on 100 / 240 50/60 Hz or 12V DC.
<b>FEATURES</b>	<ul style="list-style-type: none"> <li>• Super-bright Xtreme Lumens design</li> <li>• CREE® LED technology – 50,000+ hours LED</li> <li>• Flashlight/Floodlight/Dual-Light</li> <li>• Momentary or constant-on plus 3 brightness levels &amp; strobe</li> <li>• Sharp focused flashlight beam</li> <li>• High-efficiency deep parabolic reflector</li> <li>• Effective beam distance of 275 meters (over 902 feet)</li> <li>• Unfocused wide-beam floodlight for close-up illumination</li> <li>• Dual-Light (flashlight &amp; floodlight at the same time) for maximum safety &amp; versatility</li> <li>• Aircraft-grade 6061-T6 aluminum housing/tail cap and 316 stainless steel bezel</li> <li>• Type III hard anodized finish</li> <li>• Non-slip grip</li> <li>• Flashlight/strobe – body switch</li> <li>• Floodlight – second body switch</li> <li>• Powerful integrated tail cap magnet for hands-free usage</li> <li>• Waterproof</li> <li>• Impact &amp; chemical resistant</li> <li>• Serialized for personal identification</li> <li>• Powered by Lithium-ion rechargeable battery (included)</li> <li>• Includes light, battery and the anti-roll ring only</li> </ul>
<b>WARRANTY</b>	Limited Lifetime warranty • Lifetime on LED, housing, lens, electronics and switches. One year on battery pack and chargers from date of purchase. Excludes normal wear and abuse.


**APPROVALS**



**OPTIONAL ACCESSORIES**

Wall or Vehicle Mountable Charger, AC Power Supply, DC Power Supply, 5 Bank Charger, Direct Wire Kit, USB Charging Cable, Red, Yellow & Blue Safety Cones

<b>FL 1 STANDARD</b> High / Mid / Low <b>650 / 300 / 100 LUMENS</b>	 <b>2m</b>	 High 275m Mid 200m Low 75m
	 High 3.0h Mid 6.0h Low 17.0h	 <b>1m</b>

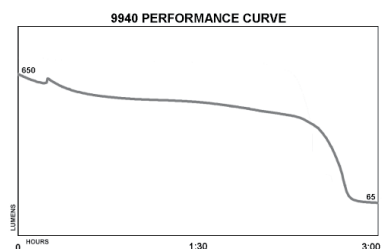

Designed in USA, manufactured in China at a ISO-9001 certified Bayco facility.

PDS\_NSR-9940XLLB\_140409\_A