


NSP-1402B

Dual-Switch Dual-Light™ Flashlight- Non-Rechargeable

MARKET APPLICATIONS	Law enforcement, fire & rescue, industrial, security, hardware/tool, automotive, hunting/recreation.
DESCRIPTION	This non-rechargeable dual-switch Dual-Light™ flashlight has two body switches offering the user a choice of flashlight, floodlight or dual-light operation. Its compact oval design makes it convenient to use and carry. The water resistant housings are made from engineered polymer and have a soft touch finish. The light a white flashlight and a red floodlight and comes with a removable pocket/belt clip. Power comes from 2 included AAA batteries.
CASE MATERIAL	Engineered Polymer - Black
DIMENSIONS	Length: 5.3 inches (135 mm) • Handle diameter: 1.1 x 0.8 inches (28 x 20 mm)
WEIGHT	Weight: 2.2 oz. (62 g) with batteries installed.
LENS	Unbreakable polycarbonate with scratch resistant coating.
LIGHT SOURCE	Cree® LED. Impervious to shock with a 50,000 hour lifetime.
LIGHT OUTPUT	Flashlight - 60 lumens, Red Floodlight - 15 lumens
ON/OFF	Top Body Switch - Flashlight, Bottom Body Switch - Floodlight
RUN-TIME	Flashlight - 3 hours, Floodlight -2.8 hours
BATTERY	2 AAA Premium Batteries (included)
FEATURES	<ul style="list-style-type: none"> • CREE® LED technology – 50,000+ hours LED • Flashlight/Red Floodlight • Focused flashlight beam for distance illumination • Unfocused wide-beam floodlight for close-up illumination • Red floodlight for night vision preservation • Engineered polymer housing with Soft-touch finish • Dual body switches • Non-slip grip • Water resistant • Impact & chemical resistant polymer housing • Powered by 2 AAA premium batteries (included)
WARRANTY	*Limited 1 Year Warranty - Product is warranted to be free from defects in workmanship and materials to the original purchaser for one (1) year from the date of purchase, and includes the LEDs, housing, lenses, electronics, switches, rechargeable batteries and chargers. Disposable non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.

APPROVALS

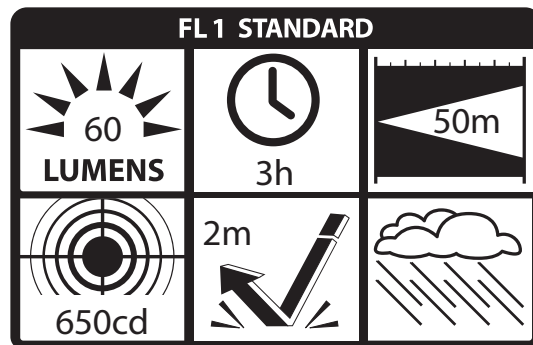

1400 PERFORMANCE CURVE

