







XPP-5452GC


Intrinsically Safe Dual-Function Headlamp with Hard Hat Clip

MARKET APPLICATIONS	Hazardous work environments, industrial, automotive, law enforcement, fire & rescue
DESCRIPTION	This Intrinsically Safe dual-function headlamp features a multi-position tilt head design. The top-mounted switch provides user-selectable high or low brightness spotlight operation. This headlamp comes with a Zero-Band Clip. Power comes from 3 AAA batteries (included).
CASE MATERIAL	Engineered Polymer - Green
DIMENSIONS	Length: 2.4 inches (61 mm) • Width: 1.9 inches (48 mm) • Depth: 1.8 inches (46 mm)
WEIGHT	Weight: 3.5 oz. (99 g) with batteries installed
LENS	Polycarbonate with scratch resistant coating
LIGHT OUTPUT	High-Brightness Spotlight: 180 lumens, Low-Brightness Spotlight: 90 lumens
ON/OFF	Single Body Switch. High-Brightness Spotlight, Low-Brightness Spotlight
RUN-TIME	High-Brightness Spotlight: 6 hours, Low-Brightness Spotlight: 19 hours
BATTERY	3 AAA batteries (included)
FEATURES	<ul style="list-style-type: none"> • CREE® LED technology – 50,000 + hours LED life • High-brightness spotlight, low-brightness spotlight • Focused spotlight beam for distance illumination • Engineered polymer housing • Single switch located on top of light • Adjustable ratchet tilt head • Integrated Stainless Steel Clip for attachment to hard hat mounting brackets • Dustproof / Waterproof • Impact & chemical resistant • 3 AAA batteries (included)
WARRANTY	Limited Lifetime Warranty

APPROVALS



FL 1 STANDARD	HIGH	LOW
	180 LUMENS	90 LUMENS
	6h	19h
	93m	62m
	2180cd	962cd
	2m	
	1m	

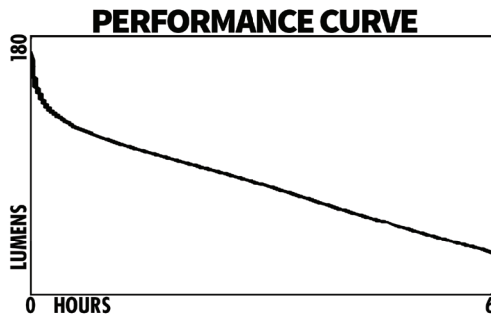

NIGHTSTICK XPP-5452GC

Bayco Products, Inc. 640 S. Sanden Blvd., Wylie, TX 75098



Intertek
ID 4001184
INTRINSICALLY SAFE
SECURITE INTRINSEQUE

CE 0359

SEE INSTRUCTION MANUAL
VOIR MANUEL

CLASS I DIV 1 GRPS A-D T3
CLASS II & III GRPS E-G T135C
CLASS I ZONE 0 AEx ia IIC T3 Ga
CLASS I ZONE 0 Ex ia IIC T3 Ga
Ⓜ II 1 G Ex ia op is IIC T3 Ga
Ex ia op is IIC T3 Ga
Intertek ITS 13 ATEX27854X
IECEx ITS 17.0002X
-20°C ≤ Tamb ≤ +40°C
1.5V/Cell AAA Alkaline

MFG MM-YY