

Duty/Personal-Size Dual-Light™ Flashlight w/ Magnet Rechargeable - Multi-Function
















TECHNOLOGY

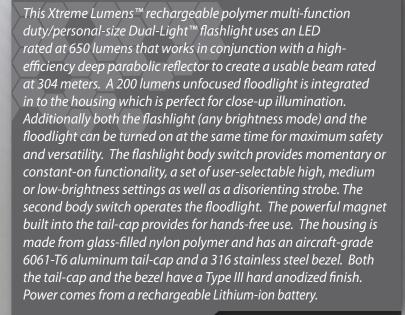

650 Flashlight
Lumens
200 Floodlight
Lumens
400 Dual-Light™
Lumens

- Flashlight/floodlight/Dual-<u>light</u> w
- Momentary or constant-on with a brightness levels a strobe
- Beam distance rated at 304 meters
- Glass-filled nylon polymer
- Powered by Lithium-foncechargeable battery (Included)











Duty/Personal-Size Dual-Light™ Flashlight w/ Magnet Rechargeable - Multi-Function

FEATURES

- LED technology
- Flashlight floodlight Dual-Light™
- Momentary or constant-on flashlight plus 3 brightness levels & strobe
- Sharp focused flashlight beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum safety & versatility
- Glass-filled nylon polymer housing
- Aircraft-grade 6061-T6 aluminum tail cap and 316 stainless steel bezel both with Type III hard anodized finish
- Non-slip grip
- Flashlight/strobe body switch
- Floodlight second body switch
- Integrated tail cap magnet for hands-free usage
- Waterproof
- Impact & chemical resistant
- Meets the requirements of NFPA-1971-8.6 (2013)
- Serialized for personal identification
- Powered by rechargeable Lithium-ion battery (included)
- Limited Lifetime Warranty*







Hands-free tail cap magnet





SPECIFICATIONS

- Lumens: flashlight high-650, medium-300, low-150, strobe-300, floodlight-200, dual-light-400
- Run-time: flashlight high-4.25 hrs, medium-9.5 hrs, low-18.75 hrs, strobe
 -6 hrs, floodlight-7.25 hrs, dual-light-7 hrs
- Recharge time: 4 hours (typical)
- Beam distance: 304 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 9.5in, head diameter: 1.6in, handle diameter: 1.2in, weight: 10.9oz

FL1 STANDARD	HIGH	MEDIUM	LOW
31/2	650 LUMENS	300 LUMENS	100 LUMENS
0	4.25h	9.5h	18h
	304m	212m	115m
	23142cd	11302cd	6028cd



INCLUDED

- Flashlight
- Rechargeable Lithium-ion battery
- Wall/vehicle mountable charger
- Anti-roll ring
- AC power supply
- 12 V DC power supply



MODELS / ACCESSORIES

Model	Description	UPC 0 17398
NSR-9920XL	Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, AC and 12V DC charging cords and anti-roll ring - Red	80388 5
NSR-9920XLDC	Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with wall/vehicle mountable charger, battery, 12V DC charging cord and anti-roll ring - Red	80389 2
NSR-9920XLLB	Rechargeable single switch (flashlight) and single switch (floodlight) polymer dual-light and integrated tail cap magnet with battery and anti-roll ring - Red	80390 8
9600-BATT	Replacement Lithium-ion battery	80222 2
9600-USB	USB cord – 27in	80227 7
9600-RCONE	Red cone	80226 0
9600-YCONE	Yellow cone	80228 4
9600-BCONE	Blue cone	80223 9
9000-CHGR5	5 bank charger	80475 2
NS-DW12	Direct wire kit	807166

^{*}Limited Lifetime Warranty • Product is warranted to be free from defects in workmanship and materials for the original purchaser's lifetime. The Limited Lifetime Warranty includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two (2) years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.