

LI-ION RECHARGEABLE

XPR-5590RX / XPR-5590RCX

INTRINSICALLY SAFE SCENE LIGHT

**NIGHTSTICK**<sup>®</sup>  
Life Depends on Light™

## MAGNETIC MOUNT

Non-marring rubber covered base positions light for **360° rotation** and **holds firm**.



**Steel-reinforced carry handle** also functions as convenient mounting hook where needed.



**Locking cam** allows carry handle to telescope to ideal length and position.




**Large adjustment knobs** means light can be positioned and secured for hands-free work.



**Sealed switch and charging port cap** ensure full IP-67 waterproof & dustproof protection.

CERTIFIED

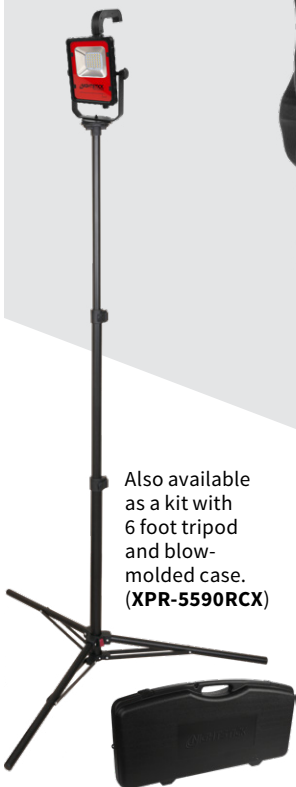

Also available as a kit with 6 foot tripod and blow-molded case. (XPR-5590RCX)

# 1100 LUMENS

1-800-233-2155 • 1-469-326-9400 • [nightstick.com](http://nightstick.com)

© 2019 Bayco Products Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit [nightstick.com](http://nightstick.com) for product updates.

INTRINSICALLY SAFE

# SCENE LIGHT

LI-ION RECHARGEABLE

**ITEM NUMBER/UPC**

XPR-5590RX - 017398806985  
 XPR-5590RCX - 017398806992

**CERTIFICATIONS**

- CE
- BC
- cETLus
- Meets requirements of NFPA 1971-8.6 (2013)

**CASE MATERIAL**

- Lightweight 6061-T6 aluminum

**LUMENS/RUNTIME**

- HIGH: 1100L, 4 hrs. runtime
- LOW: 500L, 8 hrs. runtime

**WATER RATING**

- IP-67 Waterproof

**DROP RATING**

- 2 meters

**DIMENSIONS**

- LENGTH: 12 in (305mm)
- WIDTH: 6.1 (155mm)
- DEPTH: 3.5 in (89mm)
- WEIGHT: 52.8 oz (1,496g)

**BATTERY**

- Integrated rechargeable li-ion battery

**WARRANTY**

- 1 Year limited warranty

**WHAT'S INCLUDED**

- XPR-5590RX
- Scene Light
  - AC & DC charging cords
  - Blow-molded case
- XPR-5590RCX
- Scene Light
  - 6 foot tripod
  - AC & DC charging cords
  - Blow-molded case



Bayco Products, Inc. XPR-5590  
 640 S. Sanden Blvd., Wylie, TX 75098


ID 4001184



CLASS I DIV 2 GRPS A-D T3  
 CLASS II & III DIV 2 GRPS F-G T135°C  
 CLASS I ZONE 2 Group IIC T3  
 -20°C ≤ Tamb ≤ +40°C  
 7.4V/Cell 1514-BATT

WARNING: Risk of ignition - Do not open in a hazardous area.  
 AVERTISSEMENT: Ne pas ouvrir dans une zone dangereuse.  
 WARNING: Risk of ignition - Do not charge batteries in a hazardous area.  
 AVERTISSEMENT: Danger d'inflammation - Ne pas charger les piles dans une zone dangereuse.

XPR-5590RX PERFORMANCE CURVE

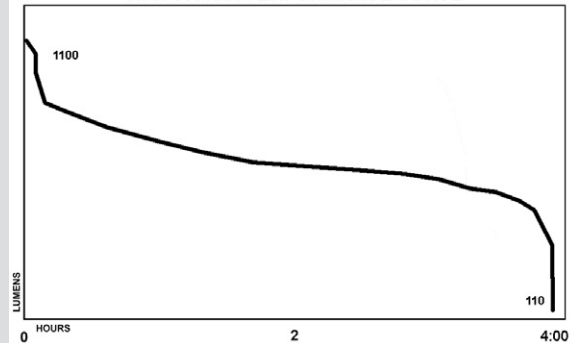

© 2019 Bayco Products, Inc. Items shown are intended as a visual representation for informational purposes only and are subject to change without notice. Visit nightstick.com for product updates. XPR-5590-Series 9.

